



**Effects of Radar Absorbing Material (RAM) on the  
Radiated Power of Monopoles with Finite Ground Plane**

**by Christos E. Maragoudakis and Vernon Kopsa**

**ARL-TN-0340**

**January 2009**

## **NOTICES**

### **Disclaimers**

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

# **Army Research Laboratory**

White Sands Missile Range, NM 88002-5513

---

---

**ARL-TN-0340**

**January 2009**

---

## **Effects of Radar Absorbing Material (RAM) on the Radiated Power of Monopoles with Finite Ground Plane**

**Christos E. Maragoudakis and Vernon Kopsa**  
Survivability/Lethality Analysis Directorate, ARL

# REPORT DOCUMENTATION PAGE

*Form Approved*  
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

**PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.**

<b>1. REPORT DATE (DD-MM-YYYY)</b> January 2009		<b>2. REPORT TYPE</b> Final		<b>3. DATES COVERED (From - To)</b> 1 – 30 June 2008	
<b>4. TITLE AND SUBTITLE</b> Effects of Radar Absorbing Material (RAM) on the Radiated Power of Monopoles with Finite Ground Plane				<b>5a. CONTRACT NUMBER</b>	
				<b>5b. GRANT NUMBER</b>	
				<b>5c. PROGRAM ELEMENT NUMBER</b>	
<b>6. AUTHOR(S)</b> Christos E. Maragoudakis and Vernon Kopsa				<b>5d. PROJECT NUMBER</b>	
				<b>5e. TASK NUMBER</b>	
				<b>5f. WORK UNIT NUMBER</b>	
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b> U.S. Army Research Laboratory Information and Electronic Protection Division Survivability/Lethality Analysis Directorate (ATTN: AMSRD-ARL-SL-EM) White Sands Missile Range, NM 88002-5513				<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b>  ARL-TN-0340	
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b>				<b>10. SPONSOR/MONITOR'S ACRONYM(S)</b>	
				<b>11. SPONSOR/MONITOR'S REPORT NUMBER(S)</b>	
<b>12. DISTRIBUTION/AVAILABILITY STATEMENT</b> Approved for public release; distribution unlimited.					
<b>13. SUPPLEMENTARY NOTES</b>					
<b>14. ABSTRACT</b> The effects of Radar Absorbing Material (RAM) on the radiation pattern of a monopole over finite ground plane are presented. The transmitted power of the monopole antenna was measured while varying the separation distances between the ground plane and the RAM. The findings of the measurements are presented in graphical form.					
<b>15. SUBJECT TERMS</b> Antenna, Radiation, RAM, Effects					
<b>16. SECURITY CLASSIFICATION OF:</b>			<b>17. LIMITATION OF ABSTRACT</b>  UU	<b>18. NUMBER OF PAGES</b>  11	<b>19a. NAME OF RESPONSIBLE PERSON</b> Christos E. Maragoudakis
<b>a. REPORT</b> U	<b>b. ABSTRACT</b> U	<b>c. THIS PAGE</b> U			<b>19b. TELEPHONE NUMBER (Include area code)</b> 575-678-3145

---

## **Contents**

---

<b>1. Introduction</b>	<b>1</b>
<b>2. Test Set-up and Procedure</b>	<b>1</b>
<b>3. Results</b>	<b>2</b>
<b>4. Conclusions</b>	<b>3</b>
<b>5. Recommendations</b>	<b>3</b>
<b>Distribution List</b>	<b>5</b>

INTENTIONALLY LEFT BLANK.

---

## 1. Introduction

---

During testing performed in anechoic chambers, antennas are placed near the chamber walls which are covered with radar absorbing material (RAM). Furthermore, the antennas could be placed near or on RAM structures. Normally “rules of thumb” are used to determine the minimum distance at which the radiators must be placed from the walls. Unfortunately, these rules do not provide any information on the effects on the radiated power when the radiators are placed at a distance shorter than the optimum distance. In this technical note the results of an investigation that was performed to determine the effects of RAM on power radiated by a monopole antenna over finite ground plane placed on a RAM block are presented.

---

## 2. Test Set-up and Procedure

---

The monopole with the finite ground plane for which radiation was to be measured was placed at a distance  $\lambda/2$  above the block of RAM at the center of the chamber. A 20-decibel (dB) standard gain horn antenna mounted on mast at the end of the chamber was used as a receiver. The receiving antenna was rotated to maximize the received power. When the separation distance was  $\lambda/2$ , the received power was used as a reference for the experiment. The separation distance between the ground plane and the RAM was then reduced and the received power was recorded and normalized. The test set-up used for the investigation is shown in figure 1.

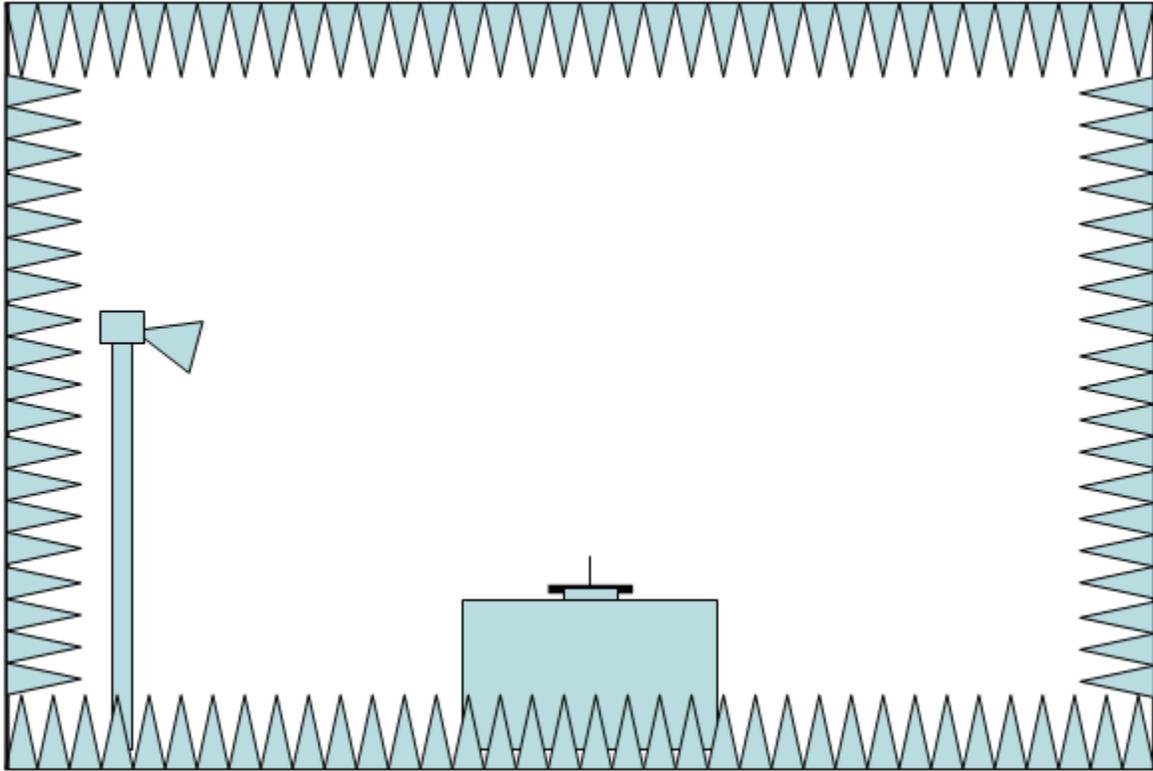


Figure 1. Test set-up.

---

### 3. Results

---

The effects of the RAM on the radiated power were determined by measuring the radiated power and varying the distance between the ground plane and the RAM. The power levels were then normalized to power received when the separation distance between the ground plane and the RAM was  $\lambda/2$ . The attenuation as a function of the separation distance between the ground plane and the RAM is shown in figure 2.

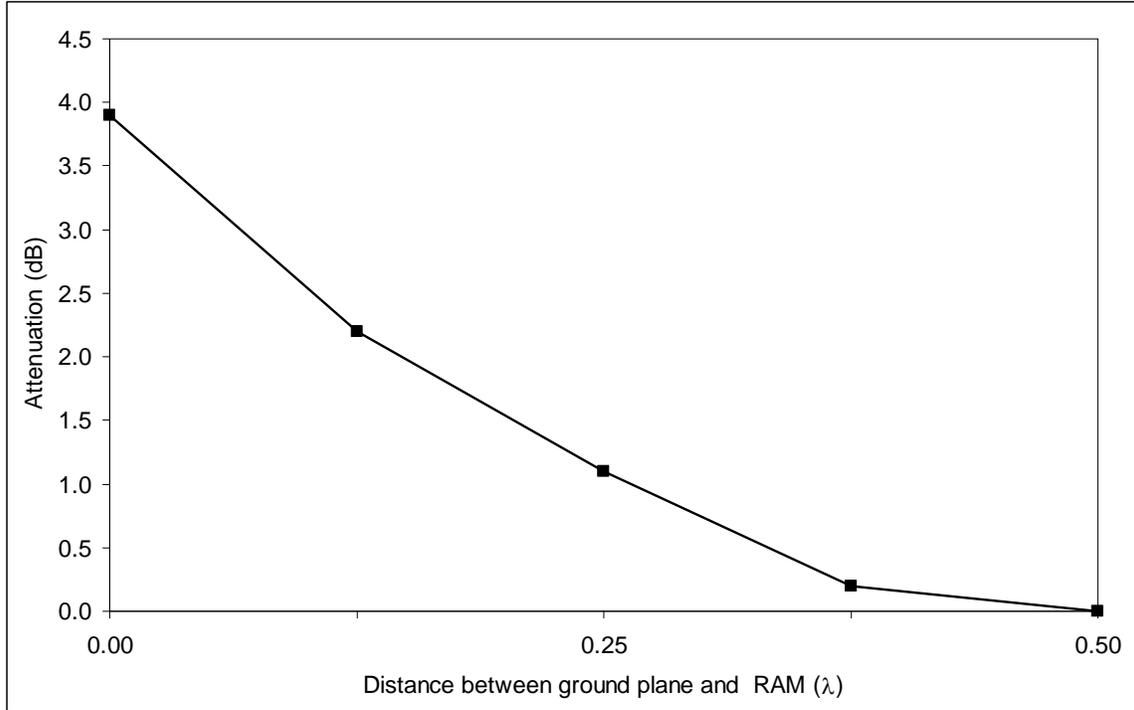


Figure 2. Effects of RAM on radiated power.

As seen from the graph, the radiated power is mostly affected when the ground plane is placed on the RAM. When the distance between the ground plane and the RAM is about  $\lambda/16$ , the attenuation is about  $-3$  dB and it decreases as the distance between the RAM and the ground plane increases. When the distance between the RAM and the ground plane is  $\lambda/2$ , the effects of the RAM are negligible.

#### 4. Conclusions

The distance between the ground plane and the RAM greatly affects the radiated power from a monopole over finite ground when it is placed on RAM. To minimize the effects of the RAM the ground plane must be placed at least  $\lambda/2$  above the RAM.

#### 5. Recommendations

It is recommended that the effects of RAM on the radiated power of other antennas be determined when the antennas are placed at distances less than  $\lambda/2$  from the RAM.

INTENTIONALLY LEFT BLANK.

NO. OF  
COPIES ORGANIZATION

1 (PDF ONLY)	ADMNSTR DEFNS TECHL INFO CTR DTIC OCP (ELECTRONIC COPY) 8725 JOHN J KINGMAN RD STE 0944 FT BELVOIR VA 22060-6218
3 CDs	US ARMY RSRCH LAB ATTN AMSRD ARL CI OK PE TECHL PUB ATTN AMSRD ARL CI OK TL TECHL LIB ATTN IMNE ALC IMS MAIL & RECORDS MGMT ADELPHI MD 20783-1197
1 CD	US ARMY RESEARCH LAB AMSRD CI OK TP TECHL LIB ATTN T LANDFRIED APG MD 21005
1 CD	US ARMY RESEARCH LAB ATTN AMSRD MAILROOM VAULT R REYNA BLDG 1624 WSMR NM 88002-5513
1 CD 1 WORD VERSION	US ARMY RSRCH LAB MELE ASSOCIATES ATTN AMSRD ARL SL EE M ADAMES BLDG 1622 ROOM 103 WSMR NM 88002-5501
5 HC	US ARMY RESEARCH LAB ATTN AMSRD ARL SL ES J GONZALEZ (1 COPY) C MARAGOUDAKIS (3 COPIES) V KOPSA (1 COPY) BLDG 1624 WSMR NM 88002-5513
Total:	13 (1 PDF, 6 CDs, 5 HCs, 1 Word Version)