


ARMY RESEARCH LABORATORY



Telemetry Systems and Electric Gun Projectiles

by William P. D'Amico

ARL-MR-499

October 2000

Approved for public release; distribution is unlimited.

20001206 143

DTIC QUALITY INSPECTED 4

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Aberdeen Proving Ground, MD 21005-5066

ARL-MR-499

October 2000

Telemetry Systems and Electric Gun Projectiles

William P. D'Amico

Weapons and Materials Research Directorate, ARL

Abstract

Using telemetry in gun-launched projectiles is not as common as it is in missile and aircraft systems. A primary reason is the launch environment of guns. Conventional solid propellant guns often produce launch accelerations approaching 100,000 g's. Additionally, if the bore is rifled, large lateral accelerations are also produced. Recently, the Hardened Subminiature Telemetry and Sensor System (HSTSS) program developed and demonstrated a series of telemetry products and technologies specifically designed to make gun-launched, in-bore, and flight measurements more routine and affordable. This report reviews the products and flight experiences from the HSTSS program and addresses the potential use of the HSTSS products and techniques on projectiles launched from electromagnetic rail guns.

Acknowledgments

The author is indebted to the entire HSTSS team led by Ronald D. Colangelo from PM-ITTS. The Advanced Munitions Concepts Branch of ARL conducted the flight demonstrations. Credit is due to L. Burke, D. Hepner, P. Muller, J. Faust, M. Hollis, B. Davis, and G. Brown with technical support from Dynamic Sciences, Inc. for their technical support. Discussions were also held with A. Zieliski and G. Katulka.

INTENTIONALLY LEFT BLANK.

Table of Contents

	<u>Page</u>
Acknowledgments	iii
List of Figures	vii
1. Background and Status of the HSTSS Program	1
2. Summary of HSTSS Flight Test Experiences	2
2.1 Kinetic Energy (KE) Projectile Flight Tests	2
2.2 Artillery Projectile Flight Tests.....	3
2.3 2.75-in Missile/Rocket Flight Tests	5
2.4 Modified 120-mm High Explosive Antitank (HEAT) Projectile Flight Tests.....	6
3. In-Bore and Magnetic Field Environment	8
4. Summary and Conclusions	10
5. References	11
Distribution List	13
Report Documentation Page	15

INTENTIONALLY LEFT BLANK.

List of Figures

<u>Figure</u>		<u>Page</u>
1.	HSTSS Mixed Prototype Multichip-Module Transmitter.....	2
2.	HSTSS Telemetry Tracer Well Plug.....	3
3.	Spin Data From the Tracer Well Plug.....	4
4.	Comparison of MEMS Axial Force History and Trajectory Code Prediction for a 155-mm Artillery Projectile.	5
5.	MEMS-Based Inertial Measurement Unit With Warhead Replacement Kit.....	6
6.	In-Bore Axial Acceleration Data Delayed and Repeated During Free Flight	7

INTENTIONALLY LEFT BLANK.

1. Background and Status of the HSTSS Program

The Hardened Subminiature Telemetry and Sensor System (HSTSS) program is under the direction of the program manager for instrumentation, targets, and threats simulation (PM-ITTS). A large number of HSTSS-based papers were recently presented at the 1999 International Telemetry Conference [1–12]. The goal of the HSTSS program is to provide a family of commercial off-the-shelf (COTS) products and assembly techniques (mechanical and electrical) that can be used to instrument gun-launched projectiles and munitions. The products include 3–5 V chip sets for telemetry and data acquisition that are compatible with emerging lithium battery technologies. Significant attention has been paid to establish affordable and configurable instrumentation-type miniature batteries [2]. The telemetry and data acquisition products will be available as packaged modules or as unpackaged electronic die. The HSTSS program has also been instrumental in the demonstration and use of microelectromechanical systems (MEMS) inertial sensors. Another program of interest is the multiple band antennas for telemetry (MUBAT) effort sponsored by the Central Test and Evaluation Investment Program (CTEIP). This program provides experience and technologies to design dual band antennas for telemetry and the global positioning system (GPS). The CTEIP and a U.S. Army instrumentation development line jointly sponsor the HSTSS program.

Major contracts have been led by the HSTSS to develop the telemetry and data acquisition devices. The telemetry products are being developed by M/A-COM, and initial deliveries and tests are just under way at the U.S. Army Research Laboratory (ARL). The telemeter will be selectively tunable across the L- and S-band frequencies according to International Range Instrumentation (IRIG) practices. A typical transmitter configuration is shown in Figure 1 [4]. The data acquisition devices are under development by the Systems and Process Engineering Company (SPEC). An expandable and programmable set of chips will meet a large variety of instrumentation needs. Several of the application-specific integrated circuits (ASIC) being developed by SPEC include: (1) a four-channel pulse code modulation (PCM), (2) an input signal conditioner (ISC), (3) a delay/repeater for in-bore measurements, and (4) a digitally implemented six-channel frequency division multiplexer [9–11]. The PCM ASIC is

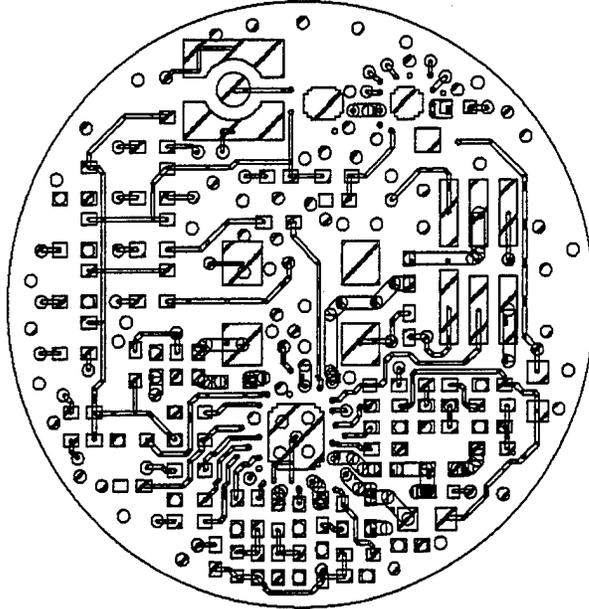


Figure 1. HSTSS Mixed Prototype Multichip-Module Transmitter (100 mW Output, 1-in Diameter \times 0.2 Height, 3 V/500 mW Supply).

expandable to 64 channels with a maximum throughput of 10 Mb/s, which is the maximum bandwidth of the M/A-COM transmitter. PCM and ISC devices will be delivered to ARL in the near future for testing. Other products and technologies have been flight tested and will be reviewed in section 2.

2. Summary of HSTSS Flight Test Experiences

A substantial number of flight tests have been conducted on various types of conventional munitions. The strength of the HSTSS philosophy (qualified components rather than a single configuration) is shown by the broad variety of applications. Even though all of the HSTSS products are not completed (notably the transmitter and data acquisition chips), many demonstrations have been accomplished.

2.1 Kinetic Energy (KE) Projectile Flight Tests. Flight diagnostics via telemetry for KE projectiles are essentially not undertaken. A monolithic rod has no payload cavity for the

location of sensors and telemetry components. Additionally, the launch environment is very severe, with axial accelerations of 75,000 g and transverse (commonly called balloting) accelerations of nearly 20% of the axial value. All direct-fire ammunition uses a tracer to aid the gunner in tracking the round. On a KE projectile, the tracer is located at the rear of the fin hub. The original HSTSS concept was to replace the standard tracer element of a KE projectile with a complete telemetry system. In fact, many of the most difficult specifications for the telemetry and data acquisition chips are driven by this requirement. Locating a telemetry system in a tracer cavity provides an even higher challenge since the rear face of the plug (to include a telemetry antenna and environmental cover) would be directly subjected to the propellant pressure and temperature.

This is exactly what has been accomplished, however. Figure 2 shows a telemetry plug that was successfully tested on a 105-mm KE training round. The system included a mechanical housing, an antenna with an environmental cover, a battery, a g-switch, an ARL-built S-band transmitter, signal/power conditioning, and a giant magnetoresistive radio (GMR) sensor for spin measurement [13]. Figure 3 shows spin data from the GMR.




Figure 2. HSTSS Telemetry Tracer Well Plug (20-mm Diameter \times 35-mm Height).

2.2 Artillery Projectile Flight Tests. Telemetry systems are often used for diagnostics in artillery systems where unused space can be found in the ogive or payload compartments, or by simply replacing a nose-located fuse. Several programs have been conducted using 155-mm and 105-mm projectiles [5]. These tests were primarily conducted to qualify HSTSS-modified lithium batteries and MEMS accelerometers. A seminal experience involved measuring axial force by an air bag accelerometer from analog devices. An ADXL05 was located along the spin axis (to avoid large off-sets due to centrifugal force). When combined with a

Spin History
Round #06 (I4)

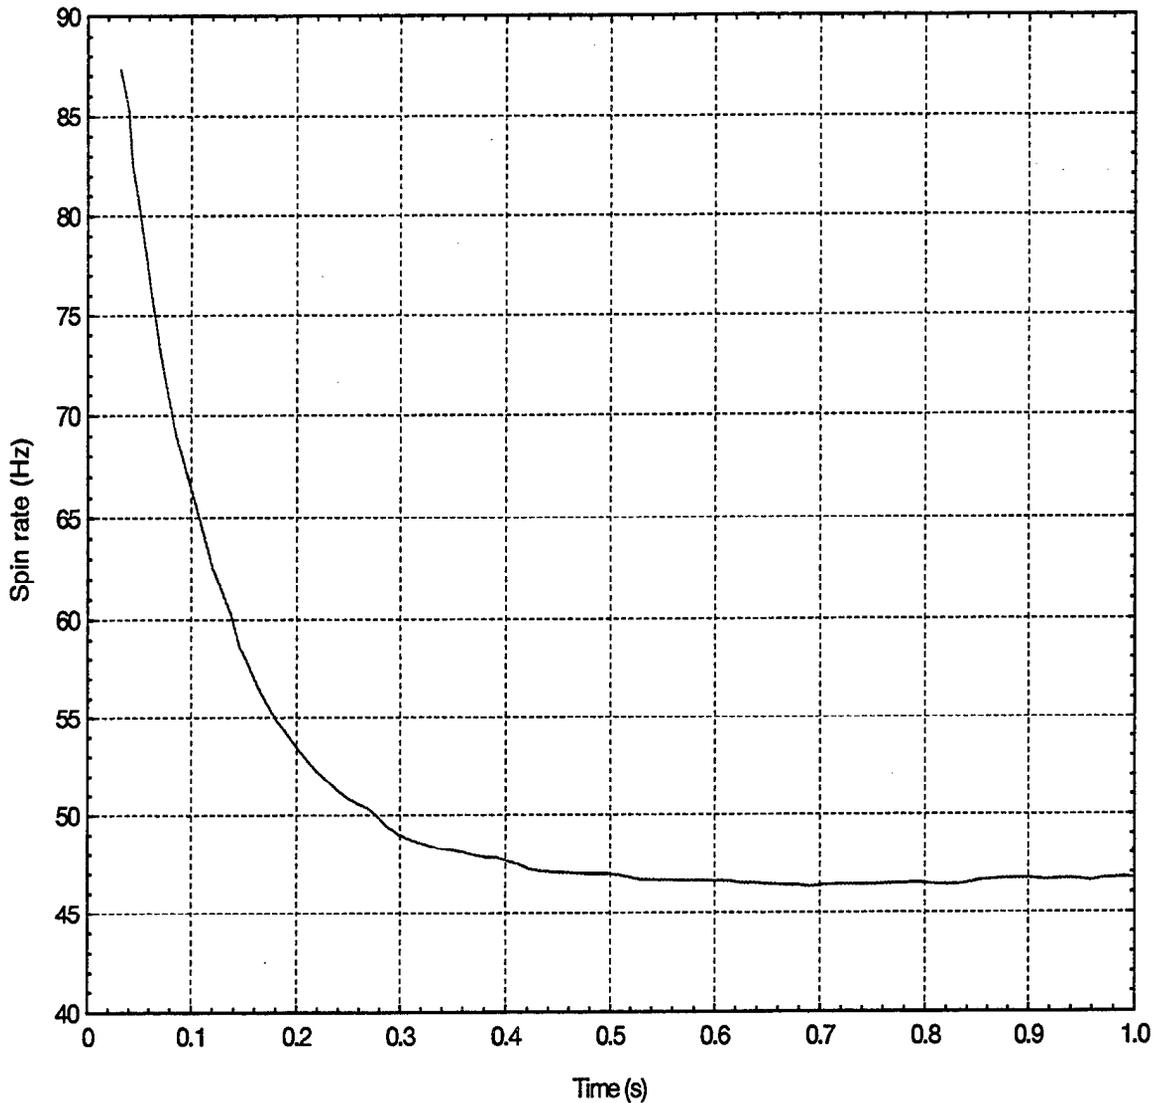


Figure 3. Spin Data From the Tracer Well Plug (105-mm KE Training Round With Rifled Tube).

GMR-measured spin history, these data yielded a drag history. These two sensors comprise a very simple one-dimensional (1-D) inertial measurement unit (IMU) that could be used for range-only corrections. Data are shown in Figure 4. A second generation of MEMS accelerometers (ADXL202, 105, 150, 250, 190) are now available; some have a frequency response approaching 20 KHz. As such, a MEMS accelerometer was used to characterize the in-flight radial vibration environment of a spin-stabilized artillery projectile.

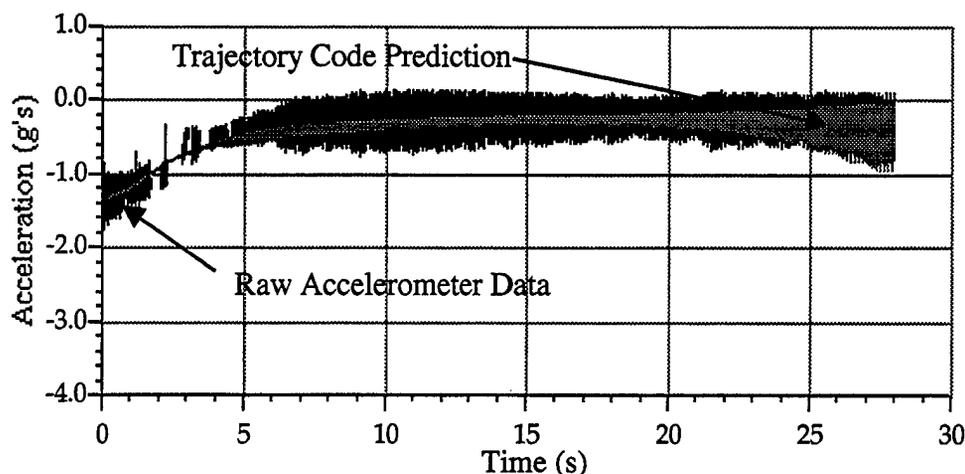


Figure 4. Comparison of MEMS Axial Force History and Trajectory Code Prediction for a 155-mm Artillery Projectile.

2.3 2.75-in Missile/Rocket Flight Tests. Although the launch environment of a 2.75-in missile/rocket is not as severe as a gun-launched projectile, the vibration environment for the solid propellant motors is not trivial. In addition, continuous and variable roll rates are common. The HYDRA-70 ballistic rocket system has very broad use, and it can be used as an “unclassified” surrogate to terminally guided air defense missiles. Axial force histories (similar methods used in the artillery example) were also gathered using MEMS accelerometers. With this as a background, ARL designed a three-axis IMU to use in operational tests of terminally guided 2.75-in missiles. The “soda can” size warhead is replaced by a telemetry kit (Figure 5) that monitors internal missile functions during jamming environments. For the first time a MEMS-based IMU could be used due to cost and space savings [14]. Nontraditional navigation sensors were used for angular rate measurements in the pitch and yaw axes. These sensors (from ATA Sensors) are magnetohydrodynamic in nature, using a loop of magnetic fluid and a permanent magnet to generate a signal in the presence of oscillatory motion and continuous roll. Because this sensor was originally designed and packaged for in-bore measurements of rifled artillery guns, it is miniature and rugged.


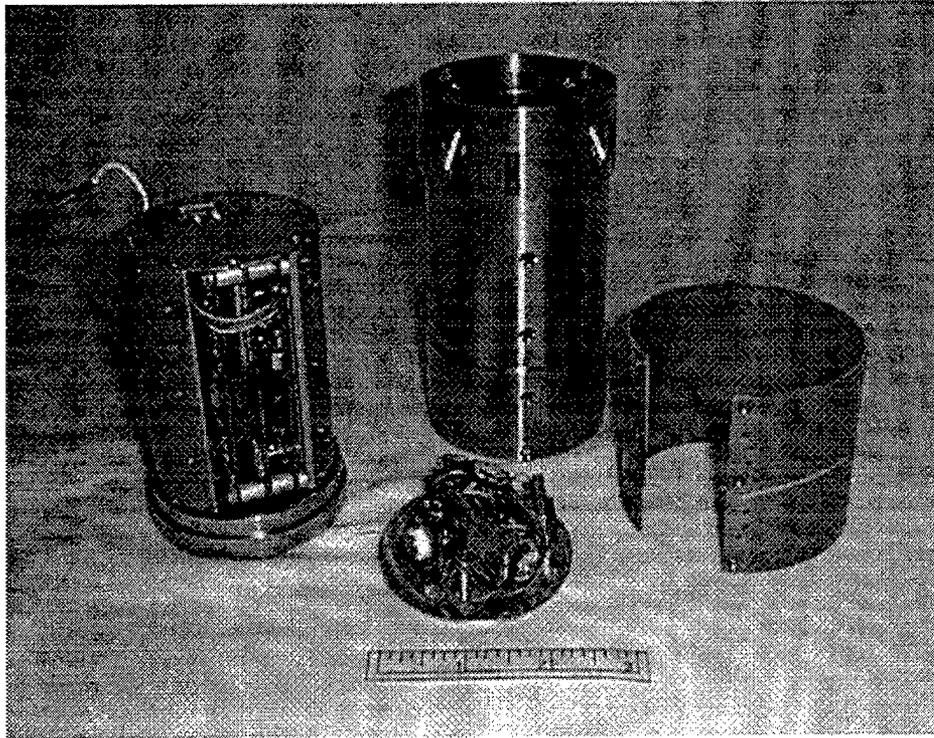


Figure 5. MEMS-Based Inertial Measurement Unit With Warhead Replacement Kit.

2.4 Modified 120-mm High Explosive Antitank (HEAT) Projectile Flight Tests. Given that the HSTSS telemetry and data acquisition products are available at the die level, high density electronic packaging techniques must be investigated and qualified for high shock levels. A recent set of flight tests has taken important initial steps for multichip module (MCM) packaging techniques [3]. Clearly, the key to survival in high shock environments is to reduce mass. Packaged ASIC's may simply have a mass and/or surface area that is too large to (even given ample mechanical support) survive large shocks. Designs must also consider reverse loading once shot exit has occurred. The difficulty with most MCM techniques is that large development costs and times can only be amortized when very high numbers of devices are produced. But this seems unrealistic for the munitions industry. HSTSS engineers identified an MCM substrate technology that is commercially available and programmable via a laser system. The design and first prototype turn-around times are only a few weeks rather than several months.

A three-channel sample and hold circuit was designed and implemented onto such a substrate and successfully fired from a modified 120-mm M831 HEAT training round. In-bore data repeated in free flight are shown in Figure 6, where a tri-axial accelerometer was recorded at 200-K samples/s, and subsequent to launch, retransmitted at a slower rate. The “repeated” data were ensemble averaged, providing high quality data at the muzzle exit. Such a diagnostic system would be beneficial in understanding the launch cycle of an armature/projectile system. In addition, as an interim and alternative solution to the HSTSS data acquisition devices, a COTS die level, field programmable gate array (FPGA) was used as an encoder data from an ADXL150 accelerometer. Both of these projectiles were launched in excess of 30,000 g.

Raw Data

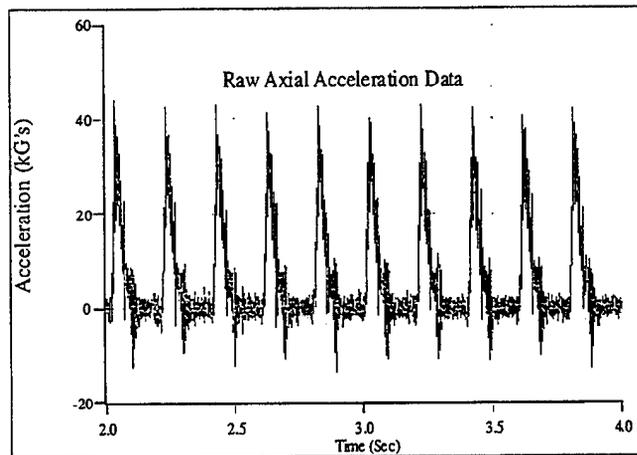

Averaged Data

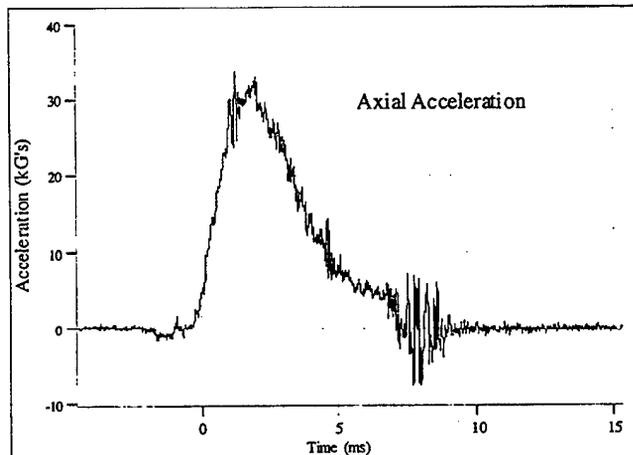


Figure 6. In-Bore Axial Acceleration Data Delayed and Repeated During Free Flight (Acceleration Data Shown in kG).

3. In-Bore and Magnetic Field Environment

A potential concern with using HSTSS products on an electromagnetic (EM) projectile are the in-bore electric and magnetic (EM) fields. The effect of the EM fields depends on whether projectile electronics and sensors are powered or unpowered during the launch cycle. Using HSTSS components for diagnostic measurements during the in-bore cycle is quite different from using a down range measurement system or a guidance, navigation, and control (GNC) system for a tactical projectile. Conformal telemetry and GPS antennae must also be considered.

The HSTSS program has not made railgun-related field measurements, but these types of data have been gathered by other researchers [15]. Measurements of EM field strength for simple rail gun were made. For large currents (hundreds of kA in a 50-mm square bore), the peak magnetic field in the bore direction ahead of the armature (dropping off rapidly with distance from the armature) is only a few tenths of a Tesla. Direct measurement of the E-field is not possible, and it is often complicated by spurious effects from other elements of the propulsion hardware (switched power supplies being a large contributor). The transverse E-field component also decays rapidly as distance down the bore ($<1 \times 10^6$ V/cm at 1000 mm of travel).^{*} The spectral content of the axial magnetic field, the transverse electric field, and the muzzle voltage were not significant for frequencies above 1 MHz. These observations could be modified for different types of armatures and larger caliber guns. Zielinski suggests "greater concern in the case where the armature motion is not restrained" [16]. Time derivatives of field quantities should be considered, especially at the muzzle exit.

Zielinski [16] also tested the following components from a multi-option fuze for mortar (MOFM) in a 50-mm square railgun: (1) a microprocessor, (2) an antenna, and (3) a turbine/alternator. All components survived and were essentially operable. Coupling the EM fields into an antenna is possible if exact tuning occurs. The MOFM proximity sensor/antenna operate well above that boundary, which is much closer to the standard telemetry and GPS bands

^{*} Breakdown and field strength voltages of silicon and silicon carbide are 0.3×10^8 V/cm and 2.4×10^8 V/cm, respectively [17].

(2.2 and 1.5 GHz). It would be very important if these experiments and results were expanded to experiments with larger caliber rail guns and for other electrical and antenna components. It is highly likely that GNC/fuse components, located in the forward portion of the projectile, would survive and operate if properly "engineered."

These data and observations cannot be directly related to the HSTSS products and their operation. The EM environments were performed under static conditions (i.e., the projectile was not launched). Some practical experiences were gained under the D2 projectile program [18]. An X-band data link was demonstrated in free flight after a launch from a solid propellant electrothermal-chemical gun [19]. Thruster and inertial guidance systems were supposed to be an integral part of the D2 projectile.

For a future smart projectile, it is logical to assume that MEMS inertial sensors would be used. Consider a typical MEMS device, where the material structure is often a piezoelectric material with a capacitive measurement principle. Under the simultaneous actions of acceleration and EM fields, problems could occur. Stiction (the nonrelease of MEMS structures subsequent to large over shocks) could be a problem. Davis has shown that powered and unpowered low-g accelerometers (of the type that could be used for GNC) have different thresholds for maximum shock survival (approximately 30,000 g powered and 60,000 g unpowered). The highly sensitive capacitive measurement circuits could be subject to small but electrical gradients. Given the inherent small size of typical MEMS devices and their packages, shielding (as considered by Zielinski) should be considered. Care must also be taken regarding the nature of the device operation. A MEMS magnetometer is under development where a xylophone-like bar is excited by a small AC current. As the bar is swept past a magnetic field, the Lorentz force causes a deflection that is capacitively measured. The current in the xylophone must be held very constant. As in the case of the MOFM experiments, various MEMS devices should only be tested [20]. If high density MCM packaging is used, then those packaging techniques must also be qualified.

4. Summary and Conclusions

The HSTSS program has developed and demonstrated a new generation of telemetry and measurement techniques particularly suited to the high-g launch environment of conventional solid propellant guns. These techniques and products should usher in new measurement capabilities [21]. Based on the work and experiences of other investigators in the rail gun community, the HSTSS products and technologies (telemetry, data acquisition, batteries, inertial sensors, and die-level electronic packaging) have a high probability of application and use compared to electrically launched projectiles. A series of diagnostic tests should be planned and conducted using the types of sensors and advanced packaging techniques that would most likely be used in the future.

5. References

1. Colangelo, R. "Program Management for 2001 Instrumentation." International Telemetry Conference, Las Vegas, NV, October 1999.
2. Burke, L. W., E. Bukowski, C. Newnham, N. Scholey, W. Hoge, and Y. Zhiyaun. "HSTSS Battery Development for Missile and Ballistic Telemetry Applications." International Telemetry Conference, Las Vegas, NV, October 1999.
3. Muller, P., L. W. Burke, S. Sommerfeldt, B. Lunceford, S. Francomacaro, and S. J. Lehtonen. "Customizable Multichip Modules for High-G Telemetry Applications." International Telemetry Conference, Las Vegas, NV, October 1999.
4. Lachapelle, J., F. McGrath, K. Osgood, B. Egri, A. Moysenko, G. Henderson, L. W. Burke, and J. N. Faust. "A Telemetry Transmitter Chip Set for Ballistic Applications." International Telemetry Conference, Las Vegas, NV, October 1999.
5. Davis, B. S., and T. G. Brown. "Combining Sensors With Airborne Telemetry Instrumentation to Make Range Measurements and Obtain Aerodynamics." International Telemetry Conference, Las Vegas, NV, October 1999.
6. Phillips, M. "Instrumentation and Logistics: Influencing Design and Ownership Costs." International Telemetry Conference, Las Vegas, NV, October 1999.
7. Carpenter, R. E., and D. Schneider. "A Modular Approach to Hardened Subminiature Telemetry and Sensor System (HSTSS) Development." International Telemetry Conference, Las Vegas, NV, October 1999.
8. Hart, A. D. "The Application of Hardened Crystal Reference Oscillators Into the Hardened Subminiature Telemetry and Sensor System (HSTSS) Program." International Telemetry Conference, Las Vegas, NV, October 1999.
9. Gibson, D., N. B. Penrose, and M. Doerr. "HSTSS-DAC Custom Integrated Circuits for Subminiature PCM Telemetry and Signal Conditioning." International Telemetry Conference, Las Vegas, NV, October 1999.
10. Doerr, M. B., W. H. Hallidy, Jr., G. B. McMillian, L. W. Burke, Jr., and J. N. Faust. "Digital FDM for the HSTSS DAC Program." International Telemetry Conference, Las Vegas, NV, October 1999.
11. Gibson, D. A., N. B. Penrose, and R. B. Wade, Jr. "HSTSS-DAC Custom ICS Impact on 2.75 Missile Telemetry." International Telemetry Conference, Las Vegas, NV, October 1999.

12. D'Amico, W. P. "Leveraging Government and Commercial Investments." International Telemetry Conference, Las Vegas, NV, October 1999.
13. "A Subminiature Telemetry System for Application to a Ballistic Projectile." ARL-WHAMA 32-98, Patent application, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, May 1999.
14. Condon, J. "A Mechanical Design for an Inertial Measurement Unit (IMU) for 2.75-inch Rockets and Missiles." ARL-MR-456, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, July 1999.
15. Zielinski, A., C. Le, and J. Bennett. "In-Bore Electric and Magnetic Field Environment." *IEEE Transactions on Magnetics*, vol. 35, no. 1, January 1999.
16. Zielinski, A. "In-Bore Magnetic Field Management." ARL-TR-1914, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, March 1999.
17. Katulka, G. Personal communication. U.S. Army Research Laboratory, Aberdeen Proving Ground, MD.
18. Dewar, P. "The D2 Hypervelocity Projectile Program." *IEEE Transactions on Magnetics*, vol. 31, no. 1, January 1995.
19. Aden, T., J. Brown, V. Churchwell, P. Dewar, A. Juhasz, Z. Kaplan, and J. Williams. "Summary of the Hypervelocity Weapon System Field Experiment." *IEEE Transactions on Magnetics*, vol. 33, no. 1, January 1997.
20. Wickenden, D., T. Kistenmacher, R. Osiander, S. Ecelberger, R. Givens, and J. Murphy. "Development of Miniature Magnetometers." *Johns Hopkins APL Technical Digest*, vol. 18, no. 2, 1997.
21. D'Amico, W. "Revolutionary Technologies for Miniature Measurement Systems-Applications to Ground Testing." AIAA 98-0234, 36th Aerospace Sciences Meeting & Exhibit, Reno, NV, 12-15 January, 1998.

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>	<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
2	DEFENSE TECHNICAL INFORMATION CENTER DTIC DDA 8725 JOHN J KINGMAN RD STE 0944 FT BELVOIR VA 22060-6218	1	DIRECTOR US ARMY RESEARCH LAB AMSRL D D R SMITH 2800 POWDER MILL RD ADELPHI MD 20783-1197
1	HQDA DAMO FDT 400 ARMY PENTAGON WASHINGTON DC 20310-0460	1	DIRECTOR US ARMY RESEARCH LAB AMSRL DD 2800 POWDER MILL RD ADELPHI MD 20783-1197
1	OSD OUSD(A&T)/ODDDR&E(R) R J TREW THE PENTAGON WASHINGTON DC 20301-7100	1	DIRECTOR US ARMY RESEARCH LAB AMSRL CI AI R (RECORDS MGMT) 2800 POWDER MILL RD ADELPHI MD 20783-1145
1	DPTY CG FOR RDA US ARMY MATERIEL CMD AMCRDA 5001 EISENHOWER AVE ALEXANDRIA VA 22333-0001	3	DIRECTOR US ARMY RESEARCH LAB AMSRL CI LL 2800 POWDER MILL RD ADELPHI MD 20783-1145
1	INST FOR ADVNCD TCHNLGY THE UNIV OF TEXAS AT AUSTIN PO BOX 202797 AUSTIN TX 78720-2797	1	DIRECTOR US ARMY RESEARCH LAB AMSRL CI AP 2800 POWDER MILL RD ADELPHI MD 20783-1197
1	DARPA B KASPAR 3701 N FAIRFAX DR ARLINGTON VA 22203-1714		<u>ABERDEEN PROVING GROUND</u>
1	NAVAL SURFACE WARFARE CTR CODE B07 J PENNELLA 17320 DAHLGREN RD BLDG 1470 RM 1101 DAHLGREN VA 22448-5100	4	DIR USARL AMSRL CI LP (BLDG 305)
1	US MILITARY ACADEMY MATH SCI CTR OF EXCELLENCE MADN MATH MAJ HUBER THAYER HALL WEST POINT NY 10996-1786		

INTENTIONALLY LEFT BLANK.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE October 2000	3. REPORT TYPE AND DATES COVERED Final, June 1999 - June 2000	
4. TITLE AND SUBTITLE Telemetry Systems and Electric Gun Projectiles			5. FUNDING NUMBERS 1L1622618.H80	
6. AUTHOR(S) William P. D'Amico				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRL-WM-TC Aberdeen Proving Ground, MD 21005-5066			8. PERFORMING ORGANIZATION REPORT NUMBER ARL-MR-499	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) Using telemetry in gun-launched projectiles is not as common as it is in missile and aircraft systems. A primary reason is the launch environment of guns. Conventional solid propellant guns often produce launch accelerations approaching 100,000 g's. Additionally, if the bore is rifled, large lateral accelerations are also produced. Recently, the Hardened Subminiature Telemetry and Sensor System (HSTSS) program developed and demonstrated a series of telemetry products and technologies specifically designed to make gun-launched, in-bore, and flight measurements more routine and affordable. This report reviews the products and flight experiences from the HSTSS program and addresses the potential use of the HSTSS products and techniques on projectiles launched from electromagnetic rail guns.				
14. SUBJECT TERMS telemetry, projectile, HSTSS			15. NUMBER OF PAGES 19	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL	

INTENTIONALLY LEFT BLANK.

USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

- 1. ARL Report Number/Author ARL-MR-499 (D'Amico) Date of Report October 2000
- 2. Date Report Received _____
- 3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) _____

- 4. Specifically, how is the report being used? (Information source, design data, procedure, source of ideas, etc.) _____

- 5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. _____
- 6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) _____

CURRENT ADDRESS	_____
	Organization

	Name E-mail Name
_____	Street or P.O. Box No.
_____	City, State, Zip Code

7. If indicating a Change of Address or Address Correction, please provide the Current or Correct address above and the Old or Incorrect address below.

OLD ADDRESS	_____
	Organization

	Name
_____	Street or P.O. Box No.
_____	City, State, Zip Code

(Remove this sheet, fold as indicated, tape closed, and mail.)
(DO NOT STAPLE)


DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 0001,APG,MD

POSTAGE WILL BE PAID BY ADDRESSEE

DIRECTOR
US ARMY RESEARCH LABORATORY
ATTN AMSRL WM BA
ABERDEEN PROVING GROUND MD 21005-5066



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

