


ARMY RESEARCH LABORATORY

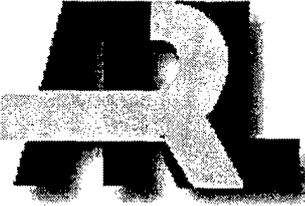

# Driver Performance Model: 1. Conceptual Framework

Joseph M. Heimerl

ARL-TR-2581

DECEMBER 2001

20011213 188

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

# Army Research Laboratory

Aberdeen Proving Ground, MD 21005-5425

---

ARL-TR-2581

December 2001

---

## Driver Performance Model: 1. Conceptual Framework

Joseph M. Heimerl  
Human Research & Engineering Directorate

---

Approved for public release; distribution is unlimited.

---

---

## Abstract

---

A comprehensive model that combines the necessary aspects of vehicle characteristics, manual control theory, and human sensory and cognitive capabilities (and limitations) is needed to efficiently and effectively guide experiments and to predict or assess overall driver performance. Such a model would enable an Army program manager to rank competing workload configurations and scenarios in proposed vehicles and to select the one(s) most promising, thereby saving resources otherwise spent on the current process, that is, multiple hardware iterations of "design-test-fix."

At the present time, no such comprehensive model exists. This report discusses a conceptual framework designed to encompass the relationships, conditions, and constraints related to direct, indirect, and remote modes of driving and thus provides a guide or "road map" for the construction and creation of a comprehensive driver performance model.

## ACKNOWLEDGMENTS

The author wishes to thank Mr. David Harrah of the U.S. Army Research Laboratory (ARL) for reviewing all the drafts of this report. Dr. Ellen Haas of ARL and Mr. John Merritt of Interactive Technologies are thanked for reading and commenting on later drafts. Dr. Arpad Juhasz of ARL is thanked for commenting on an early draft. Together, these reviewers eliminated many errors of omission and commission and made this report more readable.

INTENTIONALLY LEFT BLANK

---

## Contents

---

1.	Introduction . . . . .	1
2.	Conceptual Framework for Driving . . . . .	3
3.	Discussion . . . . .	7
4.	Implementation Strategy . . . . .	11
5.	Future Work . . . . .	13
	References . . . . .	15
	Distribution List . . . . .	17
	Report Documentation Page . . . . .	21
<b>Figures</b>		
1.	Schematic Diagram for Direct, Indirect, and Remote Driving . . . . .	3
2.	Schematic Diagram for Autonomous Driving . . . . .	8
3.	Elements of Driving . . . . .	9
4.	Implementation Strategy . . . . .	12
<b>Tables</b>		
1.	Sources of Stimulus for Three Modes of Driving . . . . .	2
2.	Corresponding Terminology . . . . .	10

INTENTIONALLY LEFT BLANK

## 1. Introduction

---

Three modes of driving a vehicle are defined: direct, indirect, and remote. The routine "through-the-windshield" driving of a high mobility multipurpose wheeled vehicle is an example of a vehicle driven directly. The on-board driver, who uses image intensifiers or forward looking infrared optical systems to navigate a vehicle at night, provides an example of a vehicle driven indirectly. The situation in which the driver is physically separated from the vehicle being driven defines remote driving. The teleoperation of an unmanned ground vehicle provides an example of remote driving.

The use of the terms "direct," "indirect," and "remote" driving usually implies a visual orientation<sup>1</sup> because driving is primarily but not exclusively a visual task<sup>2</sup>. In this report, because better terminology is not yet available, each of these terms is assigned a broader meaning, as outlined in Table 1. When this broader meaning is intended, these words are underlined (e.g., indirect). Table 1 shows the sources of stimuli that activate the human senses, which are considered in this report: visual, auditory, vibrational, and vestibular. These stimuli are deemed the most important in any of the three driving modes. Two sources of stimulus for the auditory sense are explicitly recognized: (a) internal environment, which includes noises from the engine and the vehicle<sup>3</sup>, and (b) external environment, which includes the sounds from the environment outside the vehicle<sup>4</sup>. The vestibular organs sense the body's position with respect to the vertical (Sanders & McCormick, 1993). Italics are used in Table 1 to indicate those areas in which relatively few studies have been done. For example, in Table 1, the direct and indirect modes of driving have the same sources of the stimuli for the driver's internal auditory, vibrational, and vestibular senses. These modes differ in their visual and external auditory stimuli. The italics for the indirect external auditory stimulus show that this area has not been well studied.

In both the indirect and remote modes of operation, critical visual, audio, vibrational, or vestibular cues are diminished or altogether missing. Experiments

---

<sup>1</sup>Humans are visually oriented. As Sanders and McCormick (1993) point out, "...misperceptions of the true upright direction may occur when there is a conflict between the sensations of gravity (detected by the vestibular organs) and visual perceptions; in such a case, one's visual perceptions usually dominate, even when they are erroneous."

<sup>2</sup>Consider the extremes: deaf people can drive and blind people cannot.

<sup>3</sup>These "routine" noises have sometimes been called "incidental sounds" (private communication, Haas, 2001).

<sup>4</sup>When external auditory sensors (e.g., microphones) are used, some form of active or passive noise cancellation would probably be used to reduce the external engine noise of most large vehicles.

have been conducted (e.g., see McLane & Wierwille, 1975) and hypotheses are being developed to understand how these cues affect driver performance and how best to compensate for their diminution or loss. A comprehensive model that combines the necessary aspects of vehicle characteristics, manual control theory, and human sensory and cognitive capabilities (and limitations) is needed to efficiently and effectively guide these experiments. Such a model would also predict and assess overall driver performance. At the present time, no such comprehensive driver performance model exists.

Table 1. Sources of Stimulus for Three Modes of Driving

Human senses	Direct stimulus from	Indirect stimulus from	Remote stimulus from
visual	"through windshield"	sensor-display	sensor-transmission-display
auditory: Internal*	environment	environment	<i>sensor-transmission-display</i>
external	environment	<i>sensor-display</i>	<i>sensor-transmission-display</i>
vibrational	vehicle**	vehicle**	<i>sensor-transmission-display</i>
vestibular	vehicle**	<i>vehicle**</i>	<i>sensor-transmission-display</i>

\*engine and vehicle noises

\*\*transmission of vehicle's response to the terrain.

*Italics indicate areas in which relatively few studies have been done.*

To construct such a model, a conceptual framework is first developed. A conceptual model helps frame the problem and defines what needs to be modeled (Lee, 1998). Ideally, all the relationships, conditions, and constraints among the elements (i.e., parameters and variables) that describe driving are identified. The immediate utility of this framework derives from its assembly, during which those areas that are deficient in or devoid of information can be highlighted for study<sup>5</sup>. The author envisions augmenting the conceptual framework in a continuous or iterative fashion to produce a functional, predictive driving model. Appropriate mathematical formalisms relating dependent and independent driving variables are used to convert a conceptual model into a computational model (Lee, 1998). We can accomplish this evolution by critically examining the information available from the literature and from current research, by guiding ongoing avenues of research, and by suggesting new ones.

Once such a modeling tool has been developed and verified, Army program managers will be able to predict and compare soldier-vehicle performance for all

<sup>5</sup>The italicized entries in Table 1 provide examples of this highlighting, albeit at a highly abstract level.

future conceptual and developing vehicle systems. The completed model will enable the program manager to rank competing workload configurations and scenarios for the vehicle and to select the one(s) most promising, thereby saving resources that would have been spent on the current process, that is, multiple hardware iterations of “design-test-fix” (private communication, Harrah, 1999). This report discusses a conceptual framework designed to encompass the relationships, conditions, and constraints related to the three driving modes: direct, indirect, and remote.

## 2. Conceptual Framework for Driving

The overall technical challenge is to create a model that identifies the relationships among the important variables affecting driver performance for direct, indirect, and remote driving modes. The goal of the current work is to develop a crew station model applicable to all three modes of driving. Relationships among the three driving modes are portrayed in Figure 1, which is composed of critical elements that are the subject of the remainder of this section.

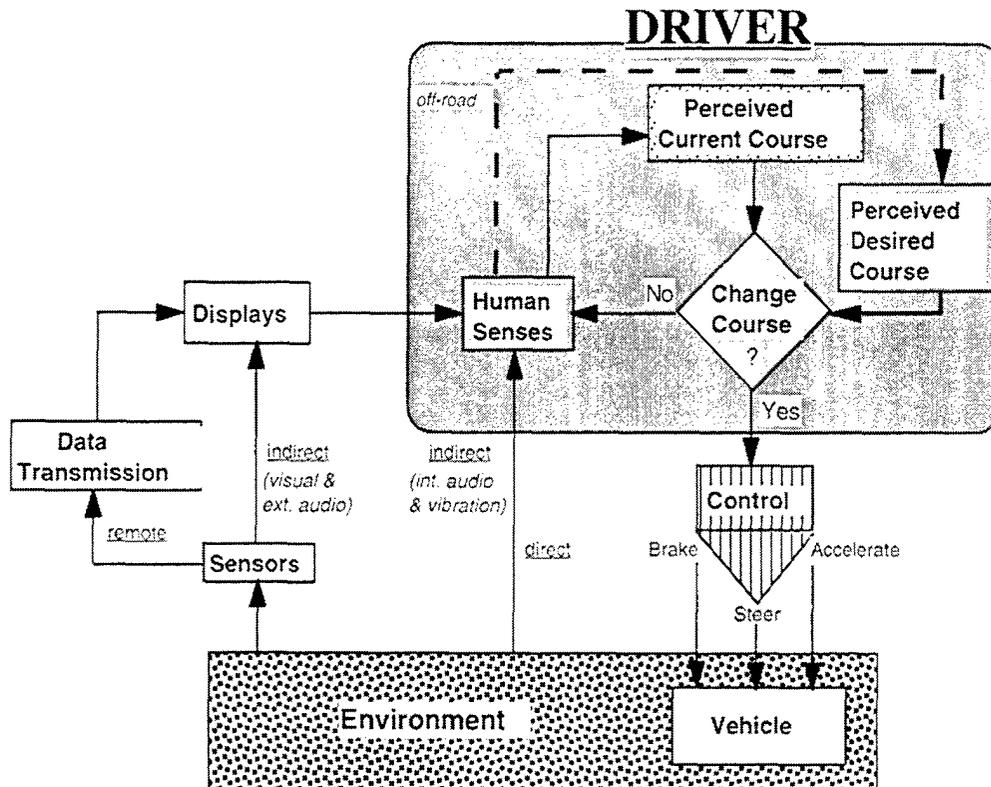


Figure 1. Schematic Diagram for Direct, Indirect, and Remote Driving.

For any driving mode, the three major functions of the driver are

1. To determine the current course (or present course location),
2. To decide whether this course is tracking (or the present course location corresponds to) the desired course, and if not,
3. To make appropriate and necessary corrections in the vehicle's course.

When driving takes place on a roadway, the desired course is usually well defined. When driving off road, the driver has the additional task of selecting the "desired" course<sup>6</sup>. The decision to alter course is based on the driver's judgment of how well his or her perception of the actual course of the vehicle matches his or her perception of the desired course.

The **perceived current course** is determined by what is presented to the driver's senses and how this information is interpreted<sup>7</sup>. The correspondence between the **perceived desired course** and the actual course is a matter of driver interpretation and is subject to errors of judgment<sup>8</sup>. The cognitive difficulty in determining the actual course is, among other factors<sup>9</sup>, a function of whether the mode of driving is direct, indirect, or remote.

A **perceived desired course** may be defined as a path that enables one to move a vehicle to a specified location with a minimum of difficulty and as quickly as practical, that is, within the constraints of the mission, the person, the vehicle, and the environment (private communication, Harrah, 2001). The **perceived desired course** is presumed to be known in space and time or is iteratively determined. An example of the former situation is directing, for example, a Bradley fighting vehicle to travel over a system of roads from an assembly area to an engagement area by a certain time. An example of the latter situation is the maneuvering of a vehicle in an off-road scenario. The dashed line labeled "*off-road*" in Figure 1 acknowledges the fact that the desired course may have to be iteratively determined while the vehicle is being driven. That is, the driver must select the path to traverse since there is no road. In the *off-road* situation, the driver is more cognitively loaded, and the driver's understanding of a **perceived desired course** is subject to greater errors of judgment.

---

<sup>6</sup>Even when driving on a roadway with obstacles (e.g., with pot holes or bomb craters), the driver must select an appropriate "desired" course.

<sup>7</sup>The ability to interpret is a function of many variables, such as training and fatigue.

<sup>8</sup>Global positioning system (GPS) information could accurately provide the current location of the vehicle and its final position. In the opinion of the author, GPS appears to benefit on-road travel more than off-road travel, where other factors such as the determination of the vehicle's path between trees, around boulders, and across ditches seems to be the more immediate and critical challenge (see, for example, Collins, Piccione, and Best, 1998).

<sup>9</sup>For example, one would normally expect off-road driving to increase the driver's cognitive workload.

By comparing the **perceived current course** with the **perceived desired course**, the driver decides whether to **change course**. If the driver decides that the vehicle is on course, the answer is "no." The driver does not alter the **control** settings of the vehicle and continues to scan the displays (or performs other functions not shown in Figure 1). If the answer is "yes," the driver will activate one or more controls to alter the course of the vehicle. Among the methods of vehicle **control**, a wheel to **steer** and pedals to **brake** and to **accelerate** are common methods to change the velocity of the vehicle. Therefore, in addition to the cognitive aspects of decision making, there are anthropomorphic or psychomotor issues of the physical location of the controls with respect to the driver and the ease with which they can be used<sup>10</sup>.

The velocity of a land vehicle can be considered a two-dimensional vector<sup>11</sup>,  $\mathbf{v}$ , which includes the concepts of both speed and direction. The speed is a scalar and is given by  $|\mathbf{v}| = v$ . The direction is supplied by the unit vector,  $\mathbf{n}$ . Since steering may be considered a change in direction, for example,  $\Delta\mathbf{v}$ , and since the derivative of velocity with respect to time,  $\pm[d\mathbf{v}/dt] = \pm\mathbf{a}$ , corresponds to accelerating (+ $\mathbf{a}$ ) or braking (- $\mathbf{a}$ ), then formally only changes in the velocity vector need to be considered to totally describe the control of the vehicle's motion<sup>12</sup>. However, in the literature, depictions of vehicle control typically have been separated<sup>13</sup> and so they are considered as distinguishable methods of control in the scheme presented in Figure 1.

The **vehicle**, whether military or civilian, has its own limitations and capabilities. Each type of vehicle has its own suspension and handling characteristics. For the direct and indirect modes, the driver is physically present in the vehicle and is subject to its motions and vibrations (see Table 1). For the remote driving mode, the driver is not in the vehicle<sup>14</sup>.

The vehicle itself exists within an **environment** (see Figure 1), which is affected by time of day, weather, and obscurants (e.g., smoke or dust). The surface over which the vehicle is being driven can be considered part of the environment. The model should account for the vehicle's response, which is a function of its characteristics and the road or terrain over which the vehicle is being driven<sup>15</sup>. In addition, if the vehicle is part of a convoy, the **environment** could include

---

<sup>10</sup>A driver would be expected to experience a different "feel" for the same vehicle, depending on whether its linkages were hydraulic or drive by wire (private communication, Harrah, 2001).

<sup>11</sup> In two-dimensional Cartesian coordinates,  $\mathbf{v} = v_x\mathbf{n}_x + v_y\mathbf{n}_y$ , and  $\mathbf{v}\cdot\mathbf{v} = v^2 = v_x^2 + v_y^2$ .

<sup>12</sup> Mathematically, the change in vehicle velocity is given by  $\Delta\mathbf{v} = (\mathbf{v} - \mathbf{v}_0) = \mathbf{a} t$ . The integral of this expression provides the change in the vehicle's location:  $\Delta\mathbf{x} = (\mathbf{x} - \mathbf{x}_0) = \mathbf{v}_0 t + 1/2 \mathbf{a} t^2$ .

<sup>13</sup>See for example, McRuer, Allen, Weir, and Klein (1977) or Sharp, Casanova, and Symonds (2000), who have used steering, braking, and velocity as explicit methods of vehicle control.

<sup>14</sup>At the present time, whenever the driver of a remote vehicle is placed in a second vehicle, that driver is subject to the effects of motion, orientation, and vibration of the second vehicle.

<sup>15</sup>The model could also incorporate limiting parameters, such as the maximum angle to drive safely on an incline or the maximum speed to negotiate a turn safely.

whether it is the lead vehicle or a following vehicle. When driving on a dirt road, the drivers of following vehicles may be subject to the dust from the lead vehicle. When driving off road, the driver of the lead vehicle has the responsibility to select a path that others may follow. Depending on weather and terrain, the drivers of the following vehicles may also be subject to dust.

In the direct mode of driving, none of the stimuli are supplied to the driver's senses through a display; all are supplied to the driver's senses directly from the environment<sup>16</sup>.

In the remote mode of driving, all the stimuli to the driver's senses are supplied by means of displays<sup>17</sup> (see Table 1). The suite of visual, auditory, vibrational, and vestibular **sensors** employed is critically important, for it is through these data, transmitted to their corresponding **displays**, that the remote driver perceives the vehicle's local environment<sup>18</sup>. The remote driving mode requires **data transmission** from **sensors** to distant **displays** (see Table 1 and Figure 1). Sensor data<sup>19</sup> could be transmitted through physical links, such as an optical fiber, or through wireless links. Wireless transmission may be further classified by frequency and bandwidth or by whether the data are encoded.

Indirect driving can be viewed as a hybrid mode that has some characteristics of the direct and the remote driving modes. In the indirect mode, the visual and external auditory<sup>20</sup> stimuli are presented to the driver by means of **displays**, while the internal auditory, vibrational, and vestibular stimuli are obtained directly from the environment by the driver (see Table 1). In the indirect mode of driving, the suite of **sensors** employed is again critically important, for it is through these sensors that the on-board driver perceives the vehicle's local environment.

The **human senses** determine what the driver sees, hears, and feels. The **human senses** of the driver are used to perceive the vehicle's local environment directly or indirectly through the use of sensors and displays. The driver evaluates this information and determines a **perceived current course** of the vehicle, compares it with the **perceived desired course**, and decides whether to **change** the current

---

<sup>16</sup>This includes the vehicle's vibrations and the vestibular response of the driver, which are not explicitly shown in Figure 1.

<sup>17</sup>Here, "display" includes not only visual but may also include auditory, vibratory, and vestibular input.

<sup>18</sup>Glumm, Kilduff, Masley, and Grynovicki (1997) found that for any remote driving system, relatively small changes in the location and angle of the camera on board the remote vehicle affect the driving scene, which, in turn, can significantly impact the remote driver's performance.

<sup>19</sup>In the remote driving mode, control commands must also be transmitted.

<sup>20</sup>The external audio has not usually been presented to the driver.

course<sup>21</sup>. The driver continuously iterates the cycles given in Figure 1 until a final location or end time for the driving task or mission has been reached<sup>22</sup>.

---

### 3. Discussion

---

With the same or similar elements depicted in Figure 1, a schematic of autonomous mode of driving has been sketched in Figure 2. Here, the **DRIVER** of Figure 1 has been replaced by **Computer** in Figure 2, and all but the **vehicle**, **environment**, and **sensors** of Figure 1 have been replaced by a series of **computational algorithms**.

The author perceives a long lead time in the fielding of operationally autonomous units.

Despite the increasing trend toward automation and robotics in many environments, the human operator will probably continue for some time to be integrally involved in the control and regulation of dynamic physical systems (Wickens, 1986).

Horgan (1996) concluded

Artificial vision remains one of the most profoundly difficult problems in artificial intelligence.

And more recently,

How are details perceived in images? Although the experimental facts are quite well known, the conditions under which the higher cognitive centers can "fill in" missing information have not been properly worked out. Moreover, filling in of missing information can presumably work well only when the observer is preconditioned at least to the image class. Even when this is the case, there is a danger that what is "filled in" is wrong (Wells, 1997).

If the details of human perception of images are not understood, it is unlikely that a satisfactory visual sensor package will be able to be constructed so that a vehicle might autonomously navigate its environment. Thus, autonomous

---

<sup>21</sup>"Good situation awareness should increase the probability of good decisions and good performance, but it does not guarantee it" (Endsley, 2000). Situational awareness might be succinctly defined as knowing what is going on in the local environment (Endsley, 2000). Thus, the effectiveness of the decision whether to change course is affected by the driver's situational awareness, which in turn, is related to the fidelity of the suite of sensors in the indirect and remote modes of driving and to the physical and mental state of the driver in all modes of driving.

<sup>22</sup>The notions of final location and end time include mission failure (e.g., getting the vehicle stuck in the mud).

vehicles<sup>23</sup>, which only occasionally may require monitoring by a human, are still some time in the future. It appears that vehicles will be operated by a human driver in the direct, indirect, or remote mode for some time to come. Indeed, the completed model of driver performance might be used to gain insight about how one might structure an autonomous vehicle.

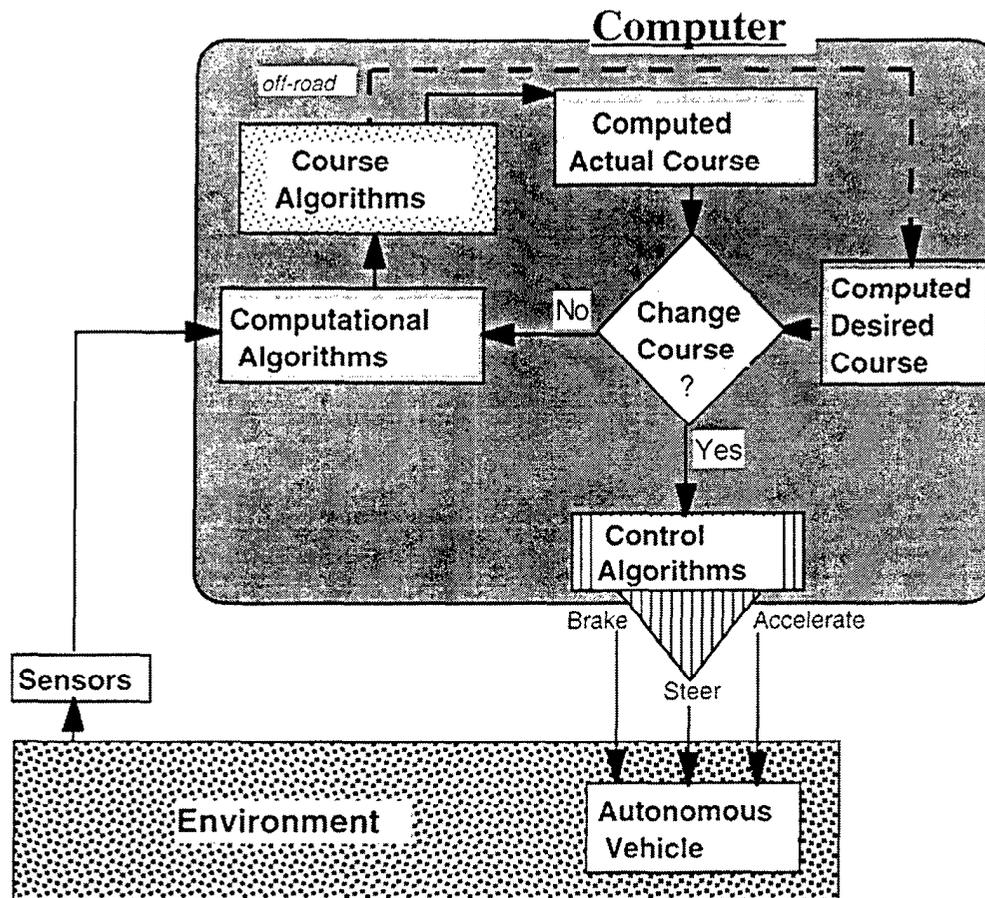


Figure 2. Schematic Diagram for Autonomous (robotic) Driving.

The conceptual framework for driving, which is given in Figure 1, is not the only framework that has been used. A description of driving has been supplied by McRuer, Allen, Weir, and Klein (1977):

Driving consists of a hierarchy of navigation, guidance, and control phases conducted simultaneously with visual search, recognition, and monitoring operations. Fundamentally, navigation is the overall selection of a route; to accomplish navigation involves a series of guidance and control operations. Guidance is concerned with more specific questions of path details and judgments, based on the given situation. Typically, guidance is made up of the selection, decision,

<sup>23</sup>The "semi-autonomous" vehicle is equivalent to the remote mode of driving.

and the definition aspects of one task... Control is the process of effecting the guidance desired by actuating the steering wheel, accelerator, and brakes in such a way that the selected path is followed at the desired velocity, and with acceptable accuracy.

Figure 3 shows a conceptual framework of the basic elements of driving an automobile, according to Wickens and Hollands (2000). They explain that while driving over a roadway, the driver may perceive a discrepancy or error between the desired trajectory of the vehicle and its actual trajectory. They state that successful driving requires *three important components* (Wickens & Hollands, 2000). Two of these components, *clear goals* and *knowledge of the current state of the vehicle*, correspond to the elements of **perceived desired course** and **perceived current course** of Figure 1. The third component of Wickens and Hollands (2000) is *an accurate mental model of the vehicle's response*, which is implied in the element whether to **change course** in Figure 1.

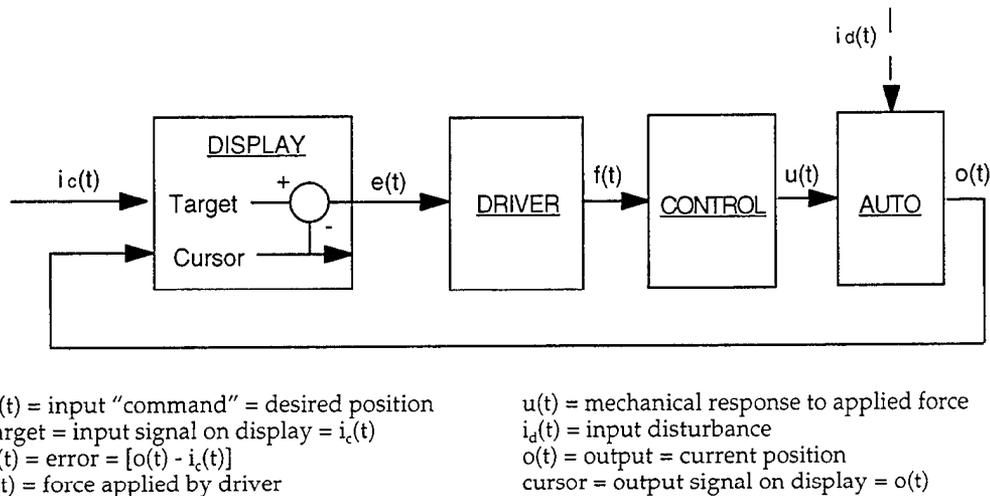


Figure 3. Elements of Driving (Wickens & Hollands, 2000).

Wickens and Hollands (2000) continue with an example to illustrate the conceptual framework of Figure 3. An automobile may have deviated from the center of the lane<sup>24</sup> and the driver wishes to reduce this error,  $e(t)$ , which is a function of time. To do so, the driver applies a force,  $f(t)$ , to the steering wheel (the control in Figure 3). This torque produces a rotation,  $u(t)$ , of the steering wheel itself, and because of the mechanical and hydraulic linkages to the tires, causes the automobile's position to move laterally on the highway. The change in the automobile's position is the output,  $o(t)$ . (Table 2 provides a cross listing of the different terminology used in this report and in Wickens & Hollands, 2000.) The symbol representing the output position on a (visual) display is called the cursor. If the operator is successful in the correction, it will reduce the

<sup>24</sup>On stretches of two- and four-lane highways, drivers tend to stay almost exactly in the center of their lanes, and the dispersions of positions about the center are small and nearly normal in shape (Soliday, 1975).

discrepancy between the automobile's position on the highway,  $o(t)$ , and the desired (or "command") position at the center of the lane,  $i_c(t)$ . The symbol representing the desired input on a display is called the target. The difference between the output signal (i.e., the cursor) and the input signal (i.e., the target) is the error,  $e(t)$ —the starting point of this illustration. The skilled driver will respond in such a way as to keep  $o(t) \approx i_c(t)$ , so that  $e(t) < \epsilon$ , the upper limit of acceptable error<sup>25</sup>.

Table 2. Corresponding Terminology

Wickens and Hollands (2000)		This report	
<u>Manual control theory</u>	<u>Seen on display</u>		
command input	= target	-->	perceived desired course
output	= cursor	-->	perceived current course

In Figure 3, the input  $i_d(t)$  is defined as a disturbance applied directly to the automobile. One example is a gust of wind that pushes the automobile off center lane. Another example is the accidental movement of the steering wheel by the driver (Wickens & Hollands, 2000). These types of "noise" input could have been made explicit in Figure 1 for the elements **control**, **vehicle**, **sensors**, **data transmission**, and **displays**. However, to keep the schematic relatively simple, they have not been included<sup>26</sup>.

In the terminology of pursuit tracking literature, the driver sees both the input (the target) and the output (the cursor) independently. In our terminology, the input is the **perceived desired course** and the output is the **perceived current course** (see Table 2). Driving is pursuit tracking<sup>27</sup> in which the operator sees both the input (or target) and the output (or cursor) independently and tries to match them (Sheridan & Ferrell, 1972). When they are matched, the vehicle is "on target." The tracking loop depicted in Figure 3 is a conceptual model of driving whose computational analog is determined by manual control theory. It does not contain the level of detail thought necessary to specify and study the relationships among critical driving elements (see Figure 1).

<sup>25</sup>Ideally,  $o(t) = i_c(t)$  and  $e(t) = 0$ .

<sup>26</sup>The "noise" input was not depicted for the **control** and **sensors** elements of Figure 2, either.

<sup>27</sup>In compensatory tracking, the operator sees only the error between the input and the output, but the goal is still the same: to null the error between the input and the output (Sheridan & Ferrell, 1972).

Figure 1 provides a conceptual framework to “see” the relationship between the elements and allows the elements to evolve from abstract into more concrete, practical operational (sub-) models. Consider the interaction between the elements of **vehicle**, (visual) **displays**, and the **human senses** in the indirect or remote modes of driving. Vestibular receptors respond only to angular and linear accelerations (Reason, 1978). Vestibular-visual interactions are important in provoking motion sickness (Bles & Wertheim, 2000; Yardly, 1992). Visual information that does not agree with information from the vestibular (and other) sensory receptors promotes motion sickness in most cases (Money, 1970).

Many direct driving studies have been performed on well-defined roadways (real or simulated). In this context, the goal is to keep the vehicle traveling along the center of the driving lane. Important cues for navigation are supplied by the boundaries of the roadway<sup>28</sup>. In addition, direct driving allows one to preview the roadway<sup>29</sup>, which is critical<sup>30</sup>. In either the indirect or remote driving modes and depending on the level of sophistication and the inherent limitations of sensors and displays, previewing may or may not be present to the same extent. In addition, indirect or remote modes of driving in a military context presuppose off-road driving over open terrain, and so the standard cues available in direct driving may be impoverished or altogether missing<sup>31, 32</sup>.

In Figure 1, any of the elements (**control**, **vehicle**, **environment**, **sensors**, or **displays**) may be either real or simulated. When any or all these real elements are replaced by their virtual counterparts, the schematic in Figure 1 can describe the many permutations of virtual or simulated driving.

---

## 4. Implementation Strategy

---

This section describes a strategy to convert the conceptual framework (given in Figure 1) into a computational, predictive model. To accomplish this, suitable quantitative representations for each of the elements need to be found or created.

---

<sup>28</sup>On curves, drivers tend to scan the inside edge of the roadway (Shinar, Rockwell, & Malecki, 1980). Gordon (1966) found that all drivers on a two-lane road with low traffic density guided their vehicles by referring to the road edges and the center line.

<sup>29</sup>On curved roads, drivers try to maintain a preview distance corresponding to  $(3 \pm 0.5)$  seconds (Shinar, McDowell, & Rockwell, 1977).

<sup>30</sup>Gordon (1966) reported that drivers traveled as fast as 25 km/hr on a curved two-lane road with a monocular field of view as small as four degrees. This ability was attributed to the presence of road edges and the center line.

<sup>31</sup>For example, with some configurations of sensors and displays, remote drivers tend to overestimate distances and clearances, that is, they get too close to obstacles before correcting their course, and they try to drive through gaps that are too narrow for passage (Miller, 1988).

<sup>32</sup>For either on-road or off-road driving, it is an assumption that performance in the indirect or remote modes must approach or exceed performance in the direct mode. The goal in a military context is to drive well enough to achieve the mission (private communication, Harrah, 2001).

These representations may take the form of computational (sub-) models, descriptive mathematical relationships among pertinent variables<sup>33</sup>, empirically determined "laws," experimentally determined limits, or physical and psychological theories. Next, the representations of each of the critical elements need to be integrated, so that the output of one element becomes the input of the next. Finally, the underlying assumptions among the quantitative representations need to be mutually compatible.

A flow chart that describes this strategy is shown in Figure 4. Two distinguishable phases are noted. Phase 1, identified by a dark background, outlines the strategy for accepting and validating individual elements or sub-models. Phase 2, whose background is white, outlines the strategy for integrating the sub-models of Phase 1 into a comprehensive driver model.

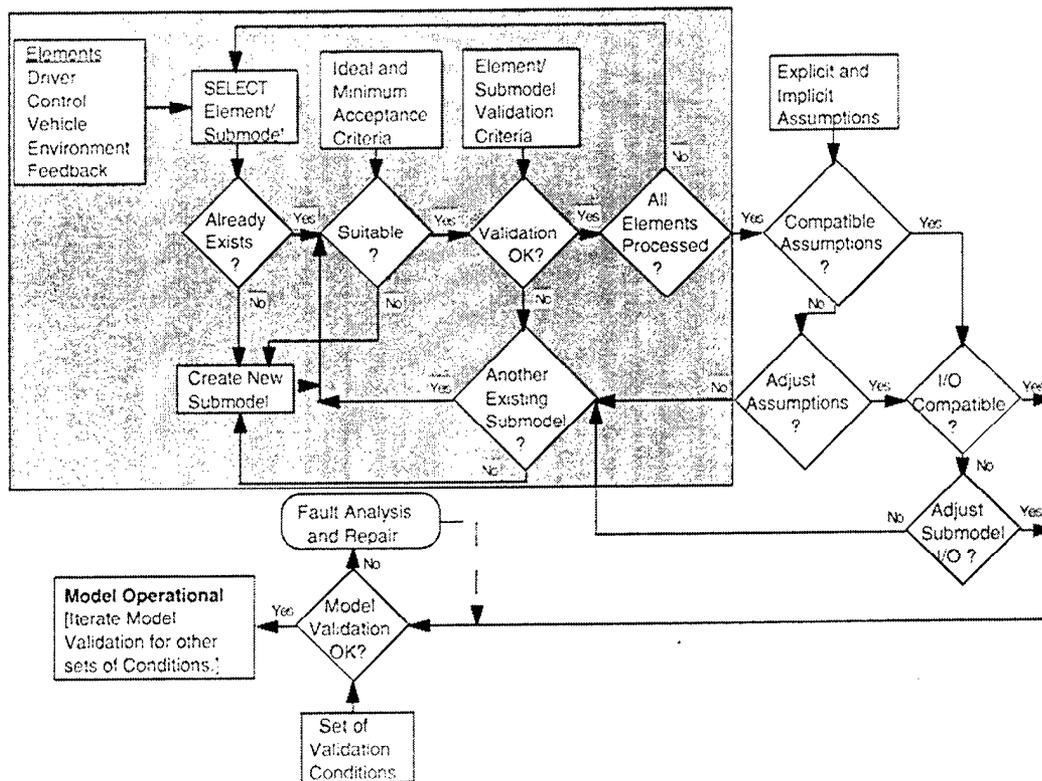


Figure 4. Implementation Strategy.

<sup>33</sup>Sometimes defined as "derivative models" that summarize the output of computational models or observations of a system's behavior (Lee, 1998).

The following comments are designed to help the reader understand Figure 4 better. The elements are those of the conceptual model except that the "sensors and displays" element is replaced by the more general term "feedback" to include sensing the vehicle's environment directly "through the windshield." The selection of a sub-model instead of an element allows for the situation in which a sub-model already exists for more than one element. Since "sub-model" is the more general term, it is used exclusively in the remaining discussion. A number of input entries shown in Figure 4 need to be determined: (a) the ideal and minimum set of acceptance criteria for an individual sub-model, (b) the validation criteria for this sub-model, (c) the explicit and implicit assumptions for each sub-model, and (d) a set of conditions to validate the comprehensive model. The term "adjust assumptions" allows for the possibility that a given sub-model may have parallel pathways with different assumptions, one set of which might be compatible with the assumptions of the other sub-models. The term "adjust submodel I/O" allows for the possibility that the input (output) coding might be readily changed to make it compatible with the output (input) of the other sub-models. If the model validation is not satisfactory, then a fault analysis and repair of the comprehensive model should be undertaken. The dashed line from this box indicates that the return may not go directly to "model validation." The return could be to any of the decision points within Figure 4. The exact point of return is determined by the findings of the fault analysis.

---

## 5. Future Work

---

Figure 4 shows that a large number of sub-models and other input are necessary to develop a predictive, comprehensive driver performance model. Many of these sub-models and other input are not known or have not yet been developed. Thus, the creation of a predictive, comprehensive driver performance model is a long-range goal. In the near term, we plan to model the characteristics of a simple vehicle and vary aspects of visual input to the driver to determine the effects of this variation on driver performance for both the direct and indirect modes of driving.

INTENTIONALLY LEFT BLANK

---

## References

---

- Bles, W., & Wertheim, A.H. (2001). Appropriate use of virtual environments to minimise motion sickness. Paper No. 7 in the *Proceedings of the Workshop of the (NATO) Research and Technology Organization Human Factors and Medicine Panel, "What is essential for virtual reality systems to meet military human performance goals?"* Hull (Quebec), Canada: St. Joseph Ottawa/Hull.
- Collins, D.J., Piccione, D., & Best, P.S. (1998, February 18). *Driver detection of drop-offs when using thermal and intensified imaging night vision devices*, final report. Alexandria, VA: DCS Corporation.
- Endsley, M.R. (2000). Theoretical underpinnings of situation awareness: A critical review. In M.R. Endsley & D.J. Garland (Eds.), *Situation Awareness Analysis and Measurement* (pp. 5, 26), Mahwah, NJ: Lawrence Erlbaum Associates.
- Glumm, M.M., Kilduff, P.W., Masely, A.S., & Grynovicki, J.O. (1997). *An assessment of camera position options and their effects on remote driver performance* (ARL-TR-1329), Aberdeen Proving Ground, MD: U.S. Army Research Laboratory.
- Gordon, D.A. (1966). Experimental isolation of the driver's visual input. *Human Factors*, 8(2), 129-137.
- Horgan, J. (1996). *The end of science. facing the limits of knowledge in the twilight of the scientific age* (p.302, note 22). London: Little, Brown, and Company.
- Lee, J.D. (1998). The utility of different types of models: Crew size evaluation in the maritime industry. *Proceedings of the Human Factors and Ergonomics Society 42nd Annual Meeting* (pp. 1227-1231). Santa Monica, CA: The Human Factors Society.
- McLane, R.C., & Wierwille, W.W. (1975). The influence of motion and audio cues on driver performance in an automobile simulator. *Human Factors*, 17(5), 488-501.
- McRuer, D.T., Allen, R.W., Weir, D.H., & Klein, R.H. (1977). New results in driver steering control models. *Human Factors*, 19(4), 381-397.
- Miller, D.P. (1988). Distance and clearance perception using forward-looking vehicular television systems, *Proceedings of the Human Factors Society 32nd*

- Annual Meeting* (pp. 1453-1457). Santa Monica, CA: The Human Factors Society.
- Money, K.E. (1970, January). Motion sickness. *Physiological Review*, 50(1), 1-39.
- Reason, J. (1978). Motion sickness: some theoretical and practical considerations. *Applied Ergonomics*, 9(3), 163-167.
- Sanders, M.S., & McCormick, E.J. (1993). *Human factors in engineering and design* (7th ed., pp. 623-624). New York: McGraw-Hill, Inc.
- Shinar, D., McDowell, E.D., & Rockwell, T.H. (1977). Eye movements in curve negotiation, *Human Factors*, 19(1), 63-71.
- Shinar, D., Rockwell, T.H., & Malecki, J.A. (1980). The effects of changes in driver perception on rural curve negotiation, *Ergonomics*, 23(3), 263-275.
- Sharp, R.S., Casanova, D., & Symonds, P. (2000). A mathematical model for driver steering control, with design, tuning and performance results. *Vehicle System Dynamics*, 33, 289-326.
- Sheridan, T.B., and Ferrell, W.R. (1972). *Man-machine systems: Information, control, and decision models of human performance* (p. 150). Cambridge, MA: The MIT Press.
- Soliday, S.M. (1975). Lane position maintenance by automobile drivers on two types of highway. *Ergonomics*, 18(2), 175-183.
- Wells, P.N.T. (1997). Problems and prospects in the perception of visual information. In W.R. Hendee and P.N.T. Wells (Eds.), *The Perception of Visual Information* (2nd ed., p. 395). New York: Springer-Verlag.
- Wickens, C.D. (1986). The effects of control dynamics on performance. In K.R. Boff, L. Kaufman, and J.P. Thomas (Eds.), *The Handbook of Perception and Human Performance, Vol. II, Cognitive Process and Performance* (p. 55). New York: John Wiley and Sons.
- Wickens, C.D., & Hollands, J.G. (2000). *Engineering psychology and human performance* (3rd ed., pp. 393-394, 521). Upper Saddle River, NJ: Prentice Hall.
- Yardly, L. (1992). Motion sickness and perception: A reappraisal of the sensory conflict approach. *British Journal of Psychology*, 83, 449-471.

<u>NO. OF</u> <u>COPIES</u>	<u>ORGANIZATION</u>
1	ADMINISTRATOR DEFENSE TECHNICAL INFO CTR ATTN DTIC OCA 8725 JOHN J KINGMAN RD STE 0944 FT BELVOIR VA 22060-6218
1	DIRECTOR US ARMY RSCH LABORATORY ATTN AMSRL CI AI R REC MGMT 2800 POWDER MILL RD ADELPHI MD 20783-1197
1	DIRECTOR US ARMY RSCH LABORATORY ATTN AMSRL C I L L TECH LIB 2800 POWDER MILL RD ADELPHI MD 20783-1197
1	DIRECTOR US ARMY RSCH LABORATORY ATTN AMSRL D D SMITH 2800 POWDER MILL RD ADELPHI MD 20783-1197
1	US ARMY RSCH DEV STDZN GP-UK ATTN COL M A HOWELL PSC 117 BOX 165 FPO AE 09080
3	CDR USA TACOM ATTN AMSTA TR MS 121 W BRYZIK AMSTA TR N MS 263 D GORSICH AMSTA TR VP MS 157 H ZYWIOL WARREN MI 48397-5000
1	MOTOR FREIGHT CARRIERS ASSN ATTN DR WILLIAM C ROGERS 499 S CAPITOL STREET SW STE 502A WASHINGTON DC 20003
1	FEDL MTR CARRIER SFTY ADMIN ATTN JERRY ROBIN (MC R R) 400 7TH STREET NW WASHINGTON DC 20590
1	TRANSPORTATION RSCH BOARD ATTN DR RICHARD PAIN 2101 CONSTITUTION AVE NW WASHINGTON DC 20418

<u>NO. OF</u> <u>COPIES</u>	<u>ORGANIZATION</u>
1	US DEPT OF TRANSPORTATION ATTN MARY TOWNSEND 55 BROADWAY CAMBRIDGE MA 02142
1	APPLIED RSCH ASSOCIATES INC ATTN BOB SHANKLE 215 DALTON DRIVE STE C DESOTO TX 75115
1	APPLIED RSCH ASSOCIATES INC GULF COAST DIVISION ATTN JOHN P WETZEL PO BOX 40128 TYNDALL AFB FL 32403
2	DCS CORPORATION ATTN DR JOHN W RUFFNER DR JIM E FULBROOK 1330 BRADDOCK PLACE ALEXANDRIA VA 22314
1	DIVERSIFIED SOFTWARE IND INC ATTN JAMES C GRIFFIN JR 2475 CORAL COURT CORALVILLE IA 52241
1	FORD MOTOR CO ADV MFACTURING TECH DEVELOPMENT ATTN TODD CLEAVER 24500 GLENDALE REDFORD MI 48239
1	FORD MOTOR CO THE AMERICAN ROAD ATTN DR BRADLEY S JOSEPH PO BOX 1899 STE 532-B6 DEARBORN MI 48121-1899
1	FORD MOTOR COMPANY SCIENTIFIC RSCH LABORATORY ATTN DR LOUIS TIJERINA 2101 VILLAGE ROAD DEARBORN MI 48128
1	INTERACTIVE TECHNOLOGIES ATTN JOHN O MERRITT 89 SOUTH STREET WILLIAMSBURG MA 01096

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	INTERNATL TRUCK & ENGINE CORP TRUCK GROUP ATTN H LENORA HARDEE 2911 MEYER ROAD FORT WAYNE IN 46803-2926
1	KLEIN ASSOCIATES INC ATTN DR TERRY STANARD 104 MCCLURE STREET DAYTON OH 45324
1	LEVISON ASSOCIATES ATTN WILLIAM H LEVISON 19 PHINNEY ROAD LEXINGTON MA 02421-7716
1	SYSTEM TECHNOLOGY INC ATTN R WADE ALLEN 13766 S HAWTHORNE BLVD HAWTHORNE CA 90250-7083
1	VERIZON-BBN TECHNOLOGIES ATTN DR RICHARD W PEW 10 MOULTON STREET CAMBRIDGE MA 02138
1	DR CHRISTOPHER WICKENS 812 DEVONSHIRE CHAMPAIGN IL 61820
1	AUTOMOTIVE RSCH CENTER ATTN TODD ANUSKIEWICZ 1008 W E LAY AUTOMOTIVE LAB ANN ARBOR MI 48109-2121
1	UNIVERSITY OF MICHIGAN COLLEGE OF ENGINEERING ATTN PROF DON CHAFFIN 1656 I&OE BLDG 1205 BEAL AVENUE ANN ARBOR MI 48109-2117
2	UNIV OF MICHIGAN TRANSPORTAN RSCH INST ATTN DR BARRY H KANTOWITZ DR MATTHEW P REED 2901 BAXTER ROAD ANN ARBOR MI 48109-2150

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
3	UNIV OF IOWA NATL ADV SIMULATOR & SIMULATOR CTR ATTN DR GINGER WATSON DR YIANNIS PAPELIS DR DARIO SOLIS 2401 OAKDALE BLVD IOWA CITY IA 52242-5003
1	UNIV OF IOWA DEPT OF INDUSTRIAL ENGG ATTN DR THOMAS SCHNELL 4135 SEAMANS CTR FOR THE ENGG ARTS & SCIENCES IOWA CITY IA 52242-1527
1	UNIV OF IOWA DEPT OF INDUSTRIAL ENGG ATTN PROF JOHN D LEE 4108 SEAMANS CTR FOR THE ENGG ARTS & SCIENCES IOWA CITY IA 52242
1	UNIV OF IOWA PUBLIC POLICY CTR ATTN DR DANIEL MCGEHEE 227 SOUTH QUAD IOWA CITY IA 52245
2	UNIV OF CENTRAL FLORIDA DEPT OF PSYCHOLOGY ATTN PROF PETER HANCOCK DR JEANNE WEAVER PO BOX 161390 ORLANDO FL 32816
1	NORTHEASTERN UNIV ATTN PROF RONALD MOURANT 334 SNELL ENGINEERING CTR 360 HUNTINGTON AVE BOSTON MA 02115
1	NORTH DAKOTA STATE UNIV DEPT OF PSYCHOLOGY ATTN PROF MARK NAWROT PO BOX 5075 MINARD 115 FARGO ND 58105
1	UNIV OF PITTSBURGH LEARNING RSCH AND DEVPMT CTR ATTN DR CHRISTIAN D SCHUNN ROOM 715 3939 O'HARA ST PITTSBURGH PA 15260

NO. OF  
COPIES ORGANIZATION

1 ARL HRED AVNC FLD ELMT  
ATTN AMSRL HR MJ D DURBIN  
PO BOX 620716  
BLDG 4506 (DCD) RM 107  
FT RUCKER AL 36362-5000

1 ARL HRED AMCOM FLD ELMT  
ATTN AMSRL HR MI D FRANCIS  
BLDG 5464 RM 202  
REDSTONE ARSENAL AL  
35898-5000

1 ARL HRED AMCOM FLD ELMT  
ATTN AMSRL HR MO T COOK  
BLDG 5400 RM C242  
REDSTONE ARS AL 35898-7290

1 ARL HRED USAADASCH FLD ELMT  
ATTN AMSRL HR ME  
K REYNOLDS  
ATTN ATSA CD  
5800 CARTER ROAD  
FORT BLISS TX 79916-3802

1 ARL HRED ARDEC FLD ELMT  
ATTN AMSRL HR MG R SPINE  
BUILDING 333  
PICATINNY ARSENAL NJ  
07806-5000

1 ARL HRED ARMC FLD ELMT  
ATTN AMSRL HR MH C BURNS  
BLDG 1002 ROOM 206B  
1ST CAVALRY REGIMENT RD  
FT KNOX KY 40121

1 ARL HRED CECOM FLD ELMT  
ATTN AMSRL HR ML J MARTIN  
MYER CTR RM 2D311  
FT MONMOUTH NJ 07703-5630

1 ARL HRED FT BELVOIR FLD ELMT  
ATTN AMSRL HR MK P SCHOOL  
10170 BEACH RD  
FORT BELVOIR VA 22060-5800

1 ARL HRED FT HOOD FLD ELMT  
ATTN AMSRL HR MV HQ USAOTC  
E SMOOTZ  
91012 STATION AVE ROOM 111  
FT HOOD TX 76544-5073

NO. OF  
COPIES ORGANIZATION

1 ARL HRED FT HUACHUCA  
FIELD ELEMENT  
ATTN AMSRL HR MY M BARNES  
RILEY BARRACKS BLDG 51005  
FT HUACHUCA AZ 85613

1 ARL HRED FLW FLD ELMT  
ATTN AMSRL HR MZ A DAVISON  
3200 ENGINEER LOOP STE 166  
FT LEONARD WOOD MO 65473-8929

1 ARL HRED NATICK FLD ELMT  
ATTN AMSRL HR MQ M R FLETCHER  
NATICK SOLDIER CTR BLDG 3  
RM 341 AMSSB RSS E  
NATICK MA 01760-5020

1 ARL HRED OPTEC FLD ELMT  
ATTN AMSRL HR MR H DENNY  
ATEC CSTE PM ARL  
4501 FORD AVE RM 870  
ALEXANDRIA VA 22302-1458

1 ARL HRED SC&FG FLD ELMT  
ATTN AMSRL HR MS R ANDERS  
SIGNAL TOWERS RM 303A  
FORT GORDON GA 30905-5233

1 ARL HRED STRICOM FLD ELMT  
ATTN AMSRL HR MT A GALBAVY  
12350 RSCH PARKWAY  
ORLANDO FL 32826-3276

1 ARL HRED TACOM FLD ELMT  
ATTN AMSRL HR MU M SINGAPORE  
6501 E 11 MILE RD MAIL STOP 248  
WARREN MI 48397-5000

1 ARL HRED USAFAS FLD ELMT  
ATTN AMSRL HR MF L PIERCE  
BLDG 3040 RM 220  
FORT SILL OK 73503-5600

1 ARL HRED USAIC FLD ELMT  
ATTN AMSRL HR MW E REDDEN  
BLDG 4 ROOM 332  
FT BENNING GA 31905-5400

1 ARL HRED USASOC FLD ELMT  
ATTN AMSRL HR MN R SPENCER  
DCSFDI HF  
HQ USASOC BLDG E2929  
FORT BRAGG NC 28310-5000

NO. OF COPIES	<u>ORGANIZATION</u>
1	ARL HRED HFID FLD ELMT ATTN AMSRL HR MP D UNGVASKY BATTLE CMD BATTLE LAB 415 SHERMAN AVE UNIT 3 FT LEAVENWORTH KS 66027-2326
1	CDR AMC - FAST JRTC & FORT POLK ATTN AFZX GT DR J AINSWORTH CMD SCIENCE ADVISOR G3 FORT POLK LA 71459-5355
1	DEPT OF THE ARMY SCIENCE & TECHNOLOGY ATTN DSCPRO FDT DR B KNAPP TAYLOR BLDG RM 12E60 2531 JEFFERSON DAVIS HWY ARLINGTON VA 22202
	<u>ABERDEEN PROVING GROUND</u>
2	DIRECTOR US ARMY RSCH LABORATORY ATTN AMSRL CI LP (TECH LIB) BLDG 305 APG AA
1	LIBRARY ARL BLDG 459 APG-AA
1	US ARMY ABERDEEN TEST CTR AUTOMOTIVE TEST DIV ATTN STEAC EN AP W C FRAZER BLDG 436
1	DIRECTOR US ARMY RSCH LABORATORY ATTN AMSRL HR MB F PARAGALLO BLDG 459
1	DIRECTOR US ARMY RSCH LABORATORY ATTN AMSRL HR MM BLDG 459
1	DIRECTOR US ARMY RSCH LABORATORY ATTN AMSRL HR MV J LOCKETT BLDG 459

NO. OF COPIES	<u>ORGANIZATION</u>
6	DIRECTOR US ARMY RSCH LABORATORY ATTN AMSRL HR SB P CROWELL R DEPONTBRIAND L FATKIN M GLUMM S ORTEGA P TRAN BLDG 459
12	DIRECTOR US ARMY RSCH LABORATORY ATTN AMSRL HR SC W DEBELLIS J GOMBASH E HAAS D HARRAH J HEIMERL (5 CYS) C SMYTH C STACHOWIAK R TAUSON BLDG 459
4	DIRECTOR US ARMY RSCH LABORATORY ATTN AMSRL HR SD B AMREIN V GRAYSON CUQLOCK-KNOPP T GHIRADELLI T LETOWSKI BLDG 520
1	DIRECTOR US ARMY RSCH LABORATORY ATTN AMSRL HR SF J WAUGH BLDG 459

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE December 2001	3. REPORT TYPE AND DATES COVERED Final	
4. TITLE AND SUBTITLE Driver Performance Model: 1. Conceptual Framework			5. FUNDING NUMBERS AMS Code 622716 PR: AH70	
6. AUTHOR(S) Heimerl, J.M. (ARL)				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory Human Research & Engineering Directorate Aberdeen Proving Ground, MD 21005-5425			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory Human Research & Engineering Directorate Aberdeen Proving Ground, MD 21005-5425			10. SPONSORING/MONITORING AGENCY REPORT NUMBER ARL-TR-2581	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)  A comprehensive model that combines the necessary aspects of vehicle characteristics, manual control theory, and human sensory and cognitive capabilities (and limitations) is needed to efficiently and effectively guide experiments and to predict or assess overall driver performance. Such a model would enable an Army program manager to rank competing workload configurations and scenarios in proposed vehicles and to select the one(s) most promising, thereby saving resources otherwise spent on the current process, that is, multiple hardware iterations of "design-test-fix."  At the present time, no such comprehensive model exists. This report discusses a conceptual framework designed to encompass the relationships, conditions, and constraints related to direct, indirect, and remote modes of driving and thus provides a guide or "road map" for the construction and creation of a comprehensive driver performance model.				
14. SUBJECT TERMS driver performance model indirect driving			15. NUMBER OF PAGES 27	
remote driving teleoperated driving			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	