



An Open-Path Obstacle Avoidance Algorithm Using Scanning Laser Range Data

**by Raymond Von Wahlde, MAJ Nathan Wiedenman,
1LT Wesley A. Brown, and Cezarina Viqueira**

ARL-MR-0715

February 2009

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Aberdeen Proving Ground, MD 21005

ARL-MR-0715

February 2009

An Open-Path Obstacle Avoidance Algorithm Using Scanning Laser Range Data

Raymond Von Wahlde
Vehicle and Technology Directorate, ARL

MAJ Nathan Wiedenman
US Army RDECOM TARDEC

1LT Wesley A. Brown
US Army, B/1-6 Infantry, Task Force 1-35 Armor

and

Cadet Cezarina Viqueira
United States Military Academy

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

| | | | | | |
|---|-------------------------|--------------------------------|---|--|--|
| 1. REPORT DATE (DD-MM-YYYY) February 2009 | | 2. REPORT TYPE Final | | 3. DATES COVERED (From - To) 8/2008-10/2008 | |
| 4. TITLE AND SUBTITLE An Open-Path Obstacle Avoidance Algorithm Using Scanning Laser Range Data | | | | 5a. CONTRACT NUMBER | |
| | | | | 5b. GRANT NUMBER | |
| | | | | 5c. PROGRAM ELEMENT NUMBER | |
| 6. AUTHOR(S) Raymond Von Wahlde, MAJ Nathan Wiedenman, 1LT Wesley A. Brown, and Cezarina Viqueira | | | | 5d. PROJECT NUMBER | |
| | | | | 5e. TASK NUMBER | |
| | | | | 5f. WORK UNIT NUMBER | |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRD-ARL-VT-UV Aberdeen Proving Ground, MD 21005 | | | | 8. PERFORMING ORGANIZATION REPORT NUMBER ARL-MR-0715 | |
| 9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) | | | | 10. SPONSOR/MONITOR'S ACRONYM(S) | |
| | | | | 11. SPONSOR/MONITOR'S REPORT NUMBER(S) | |
| 12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited. | | | | | |
| 13. SUPPLEMENTARY NOTES | | | | | |
| 14. ABSTRACT The Open-Path Area algorithm described searches a region scanned by a laser range finder for the most open path that will allow a robot of a specified width to move the furthest distance. Range data are mapped into an array space in which the column indices are the beam numbers and the rows are the range values divided into an arbitrary number of bins. The path to be searched is also mapped into this framework. The open-path search algorithm checks each beam index as a potential direction and finds the range bin index at which the path is obstructed. The path areas associated with these indices are calculated only once and stored in a look-up table. The beam index that returns the maximum open path area determines the direction the robot should move. The response of the robot is a fluid motion around obstacles in its path. | | | | | |
| 15. SUBJECT TERMS Obstacle Avoidance Algorithm, laser range data | | | | | |
| 16. SECURITY CLASSIFICATION OF: | | | 17. LIMITATION OF ABSTRACT UU | 18. NUMBER OF PAGES 20 | 19a. NAME OF RESPONSIBLE PERSON Raymond Von Wahlde |
| a. REPORT U | b. ABSTRACT U | c. THIS PAGE U | | | 19b. TELEPHONE NUMBER (Include area code) (410) 278-9738 |

Contents

| | |
|-----------------------------------|-----------|
| List of Figures | iv |
| 1. Introduction | 1 |
| 2. The Obstacle Array | 1 |
| 3. The Open-Path Algorithm | 3 |
| 4. Results and Conclusions | 8 |
| 5. Conclusions | 10 |
| Distribution List | 12 |

List of Figures

| | |
|--|----|
| Figure 1. Scanning range data, cartesian coordinates..... | 1 |
| Figure 2. Scanning range data obstacle array. | 2 |
| Figure 3. Path width in beam indices..... | 3 |
| Figure 4. Open paths (obstacle array)..... | 4 |
| Figure 5. Open paths (cartesian)..... | 4 |
| Figure 6. Open path search in obstacle array..... | 5 |
| Figure 7. Open path search in range data..... | 6 |
| Figure 8. Open path areas look-up array (intensity graph)..... | 7 |
| Figure 9. Encountered range bins and open path areas..... | 8 |
| Figure 10. Path found through obstacles..... | 9 |
| Figure 11. Paths found through cluttered room. | 9 |
| Figure 12. Path through a large empty room with a small door. | 10 |
| Figure 13. Skid-steer Segway Robotic Mobilty Platform..... | 11 |

1. Introduction

A Light Detection and Ranging (LIDAR) laser scanner provides 2D range information in a horizontal plane ahead of the scanner. It can detect obstructions within the field of view of the scanner. Such data are useful in allowing a robot to avoid obstacles in its path. The objective of the Open-Path Area algorithm described in this report is to search the region scanned by the range finder for the most open path that will allow a robot of a specified width to move the furthest distance. If the identified path is to the side, the robot should turn in that direction until the path is directly ahead. Then it will move forward.

2. The Obstacle Array

Figure 1 shows a sample set of range data from a scanning LIDAR in a Cartesian coordinate system. The LIDAR is located at the bottom center. In this case, ranges are obtained every half degree. Index zero is to the right; index 180 points directly ahead; and index 360 is to the left.

To search for an open path, it is helpful to map the range data to an array where the column indices are the beam numbers and the rows are the range values divided into an arbitrary number of bins. This “Obstacle Array” is shown in figure 2. The path to be searched must also be mapped into this space.

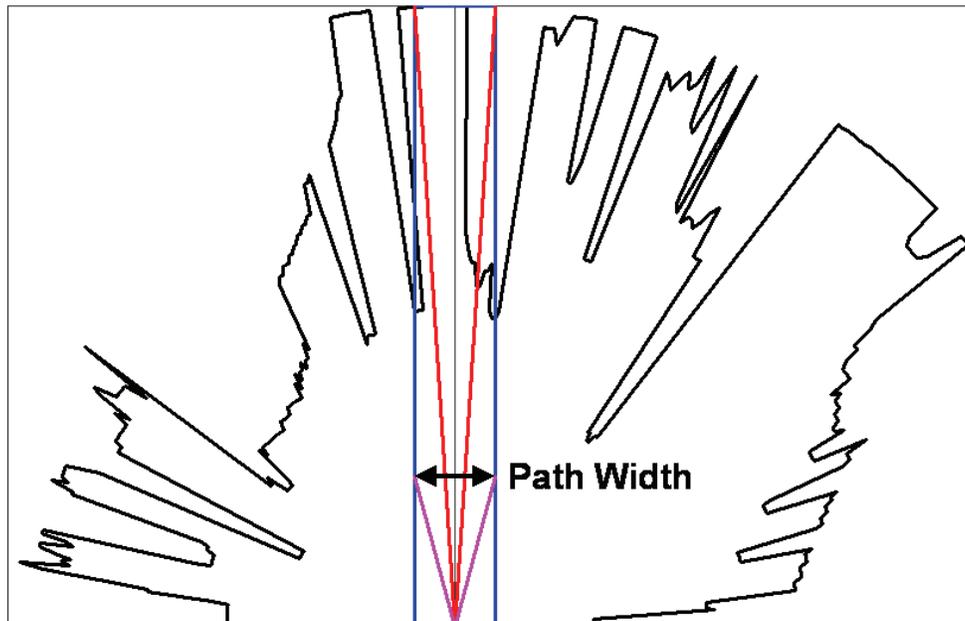


Figure 1. Scanning range data, cartesian coordinates.

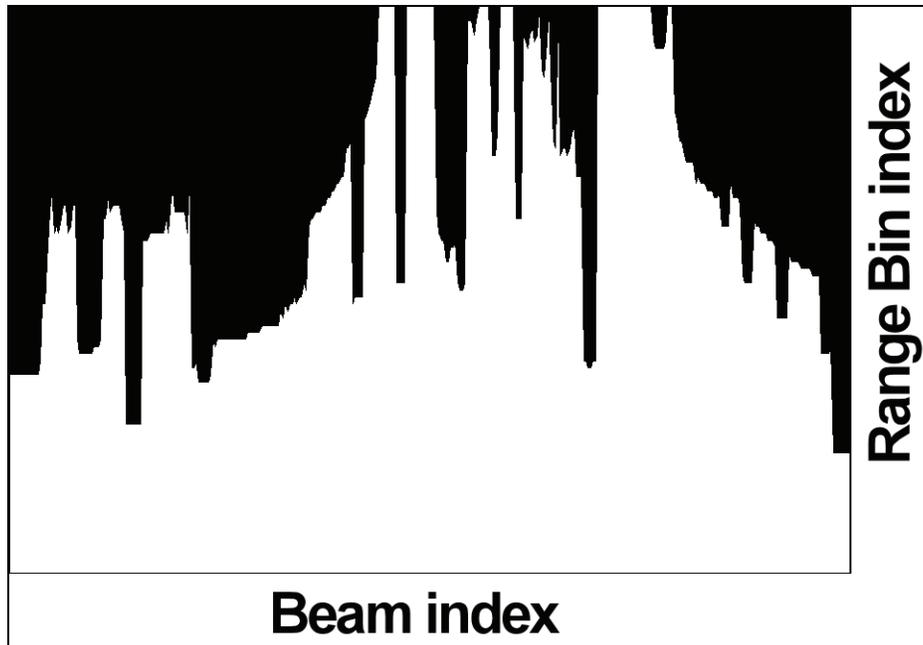


Figure 2. Scanning range data obstacle array.

The width of the path, in terms of beam indices, is a function of the range bin index, figure 3. Figure 1 shows the beams that impinge on the sides of a potential path at two sample ranges. The angle subtended by the left and right beams tapers with range. By geometry, the width of the vehicle in terms of scan angle is:

$$\text{Path Width (angle)} = 2 * \text{atan}((\text{Path Width}/2)/\text{Range}) \quad (1)$$

Subsets of that shape determine the open area of the path.

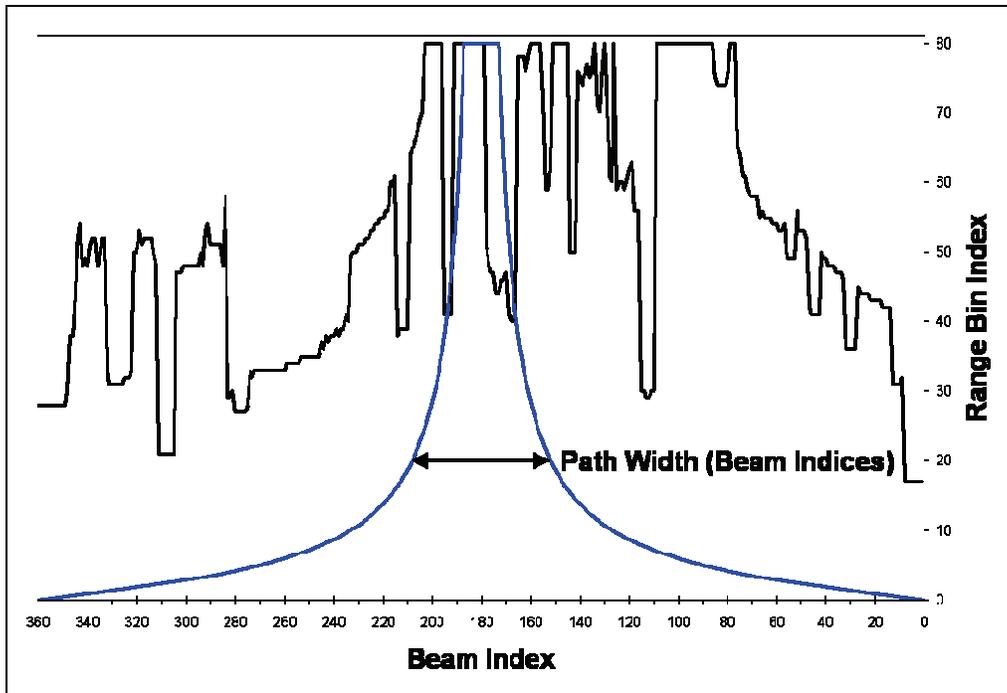


Figure 3. Path width in beam indices.

3. The Open-Path Algorithm

The Open-Path search algorithm checks each Beam Index as a potential direction and finds the Range Bin Index at which the path is obstructed. Figure 4 shows three example potential paths. These same unobstructed paths are shown in Cartesian coordinates in figure 5. The areas for each unobstructed path need to be found.

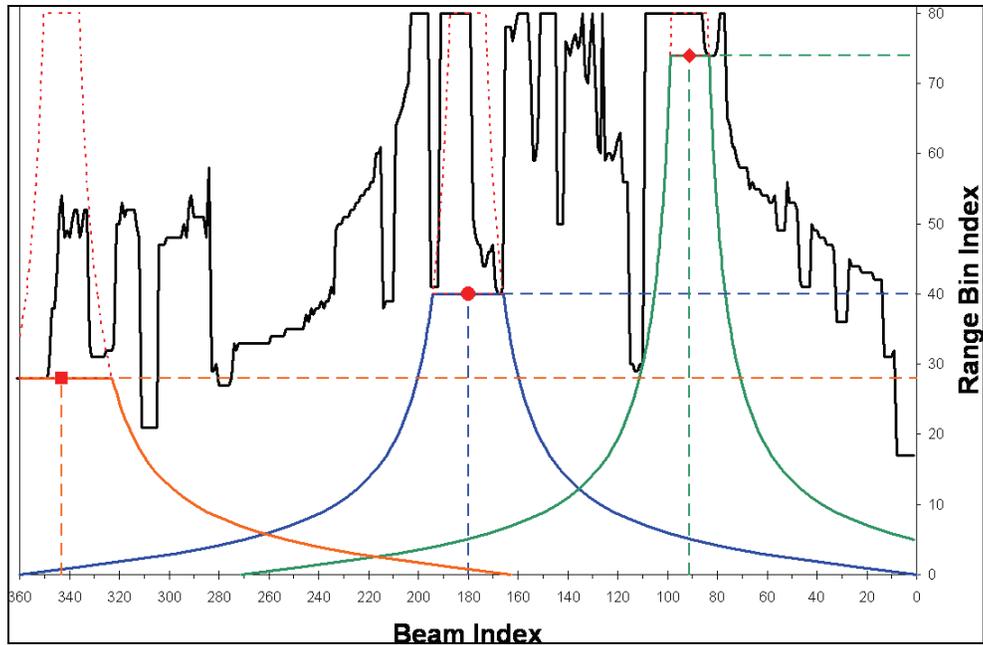


Figure 4. Open paths (obstacle array).

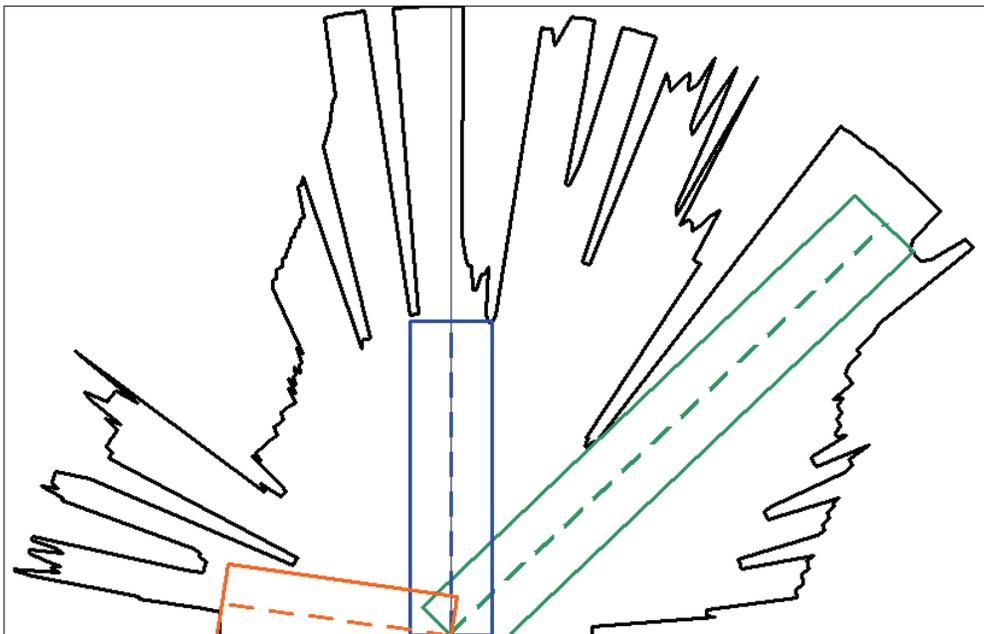


Figure 5. Open paths (cartesian).

The first implementation of the Open-Path algorithm created an actual obstacle array from the LIDAR data by placing a value of one if the element was unobstructed, and a zero if it was blocked. Then, subsets of the path width to be searched at each range bin were methodically extracted and added together until the path width encountered a zero. This gave the area of the unobstructed path. Such an approach was highly inefficient because an obstacle array had to be

created each time the range data was updated, and many calculations needed to be performed for every beam index. Figure 6 shows a few steps in the systematic search of the path width. Each element in the array subset is checked to see if it is open (shown in grey) or obstructed (shown in black). Those elements that have been searched are shown in white.

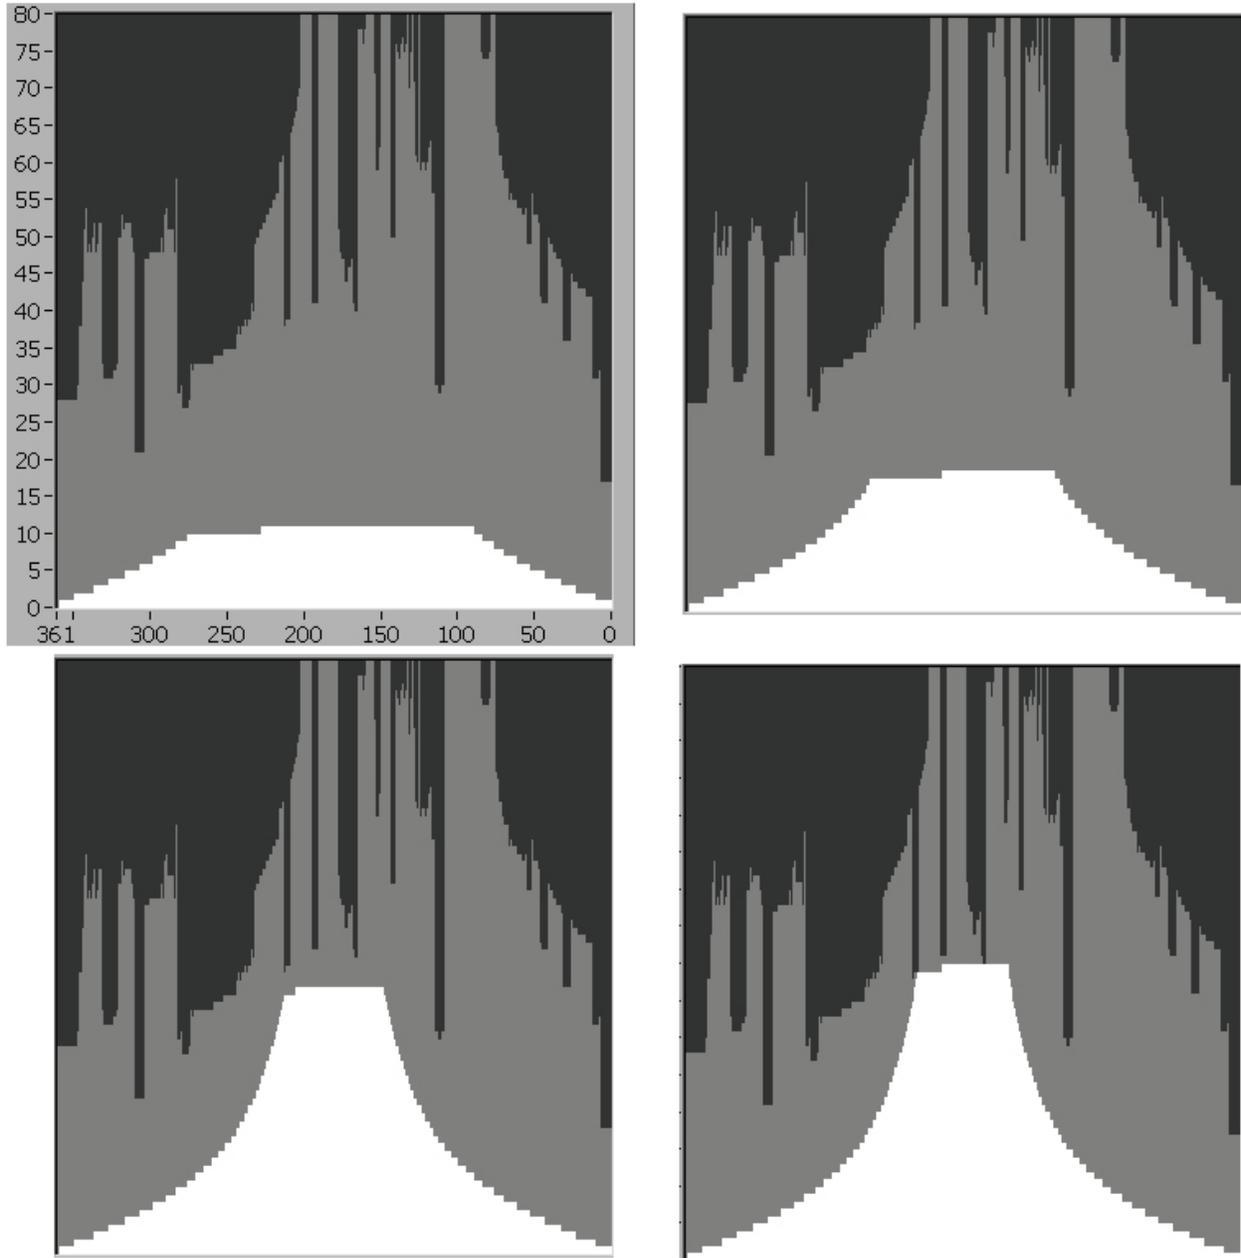


Figure 6. Open path search in obstacle array.

It became apparent that constructing the obstacle array was unnecessary and that the open path areas did not have to be computed at each step. Instead, the range data from the LIDAR could be manipulated directly. The range data consists of a one-dimensional array containing the range values for each beam scan. The index of each range value is the beam index. The range data could be divided into an arbitrary number of range bins.

Figure 7 illustrates how a search for an open path is conducted using the range data directly. The i th Beam Index ($0 \leq i \leq \text{Number of Beams}$) is the path direction being checked. For the i th Beam Index and the j th Range Bin Index, a subset of the range data is extracted between indices:

$$\{i\text{th Beam Index} - (\text{Path Width}(j)/2), i\text{th Beam Index} + (\text{Path Width}(j)/2)\} \quad (2)$$

Where $\text{Path Width}(j)$ is the width of the path at the j th Range Bin in terms of beam indices ($0 \leq j \leq \text{Number of Range Bins}$). If the subset to be extracted lies outside the length of the range data array, then the extracted portion of data is cropped on the appropriate side.

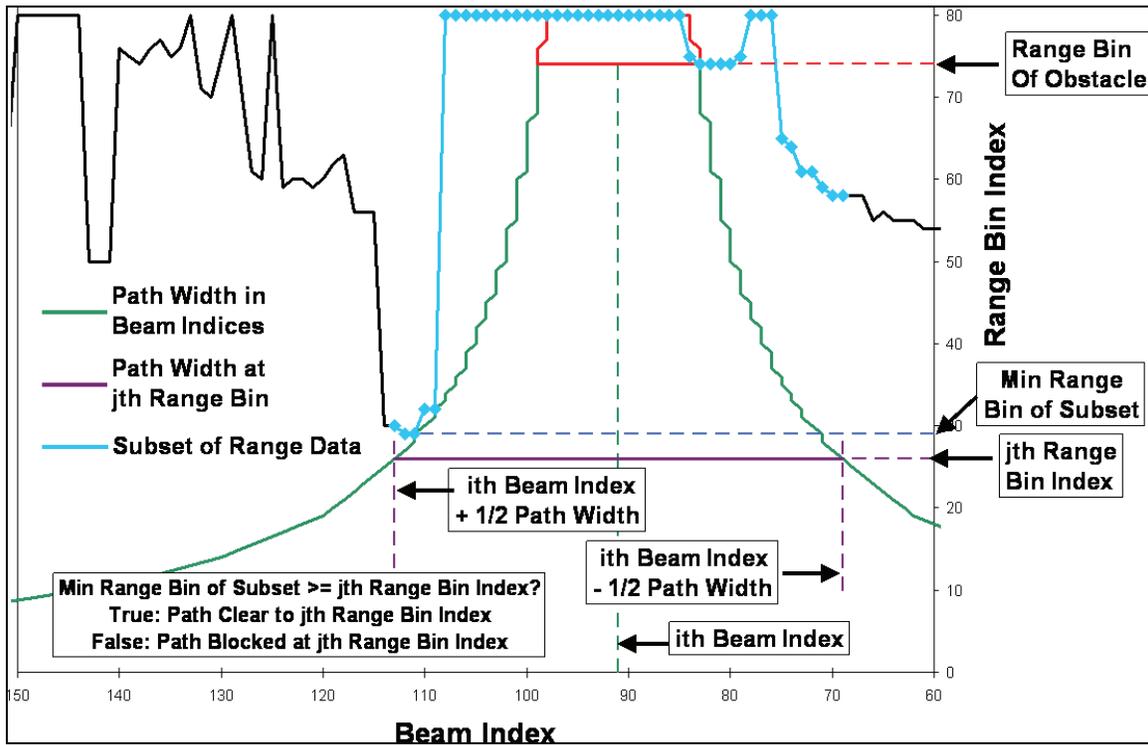


Figure 7. Open path search in range data.

Then, the minimum range bin value of the data subset is found. If that minimum range bin value is greater than or equal to the j th Range Bin Index, then the path is clear to the j th Range Bin Index. The algorithm then moves on to check the next Range Bin Index. When the minimum range bin value is not greater than or equal to the Range Bin Index, then the path is blocked at that Range Bin Index and the path search at the i th Beam Index stops. The resulting two indices, the i th Beam Index and the j th Range Bin Index, at which the path is last open identify a unique

subset of the maximum possible open path area of the shape shown in figure 3. Three such examples are shown in figure 4.

The path areas for every Beam Index and Range Bin Index combination only need to be calculated once and stored in a look-up array. Figure 8 is an intensity graph of such an array. The largest possible open area that can be scanned would be directly ahead out to the maximum range. This is the top center portion of the graph. Potential path directions to either side of the center shift a portion of the path out of the scan range so the area is less. Likewise, shorter ranges reduce the area under the curve. The array is symmetrical about the center beam index. The open area for each potential direction is read from the array using the Beam and Range Bin indices obtained from the algorithm. When computing the areas of the open paths included in this array, it is convenient to divide the range bin indices into the same number as half the beam indices. The range bin index obtained from the algorithm is scaled accordingly for the look-up array.

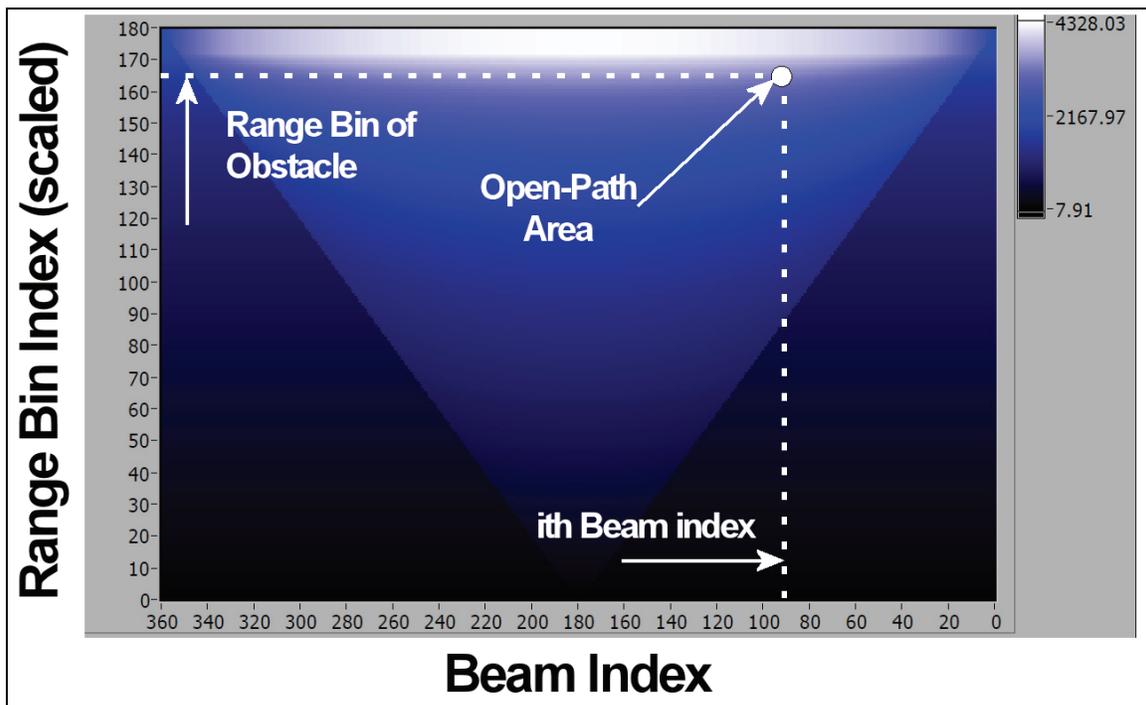


Figure 8. Open path areas look-up array (intensity graph).

Figure 9 shows the encountered Range Bin Indices and resulting open path areas for each Beam Index. The Beam Index that returns the maximum open path area determines the direction the robot should turn toward. The turning rate is proportional to the angle from the forward direction to the most open path. Greater angles will cause the robot to turn faster. When the open path is oriented closer to directly ahead, the robot will turn slower. The Forward speed of the robot is proportional to the size of the open area when the most open path is “directly ahead.” Angles to either side within some reasonable amount would qualify as directly ahead. When that

area is below a set threshold, the robot will reverse and turn slightly so it can search for a new path.

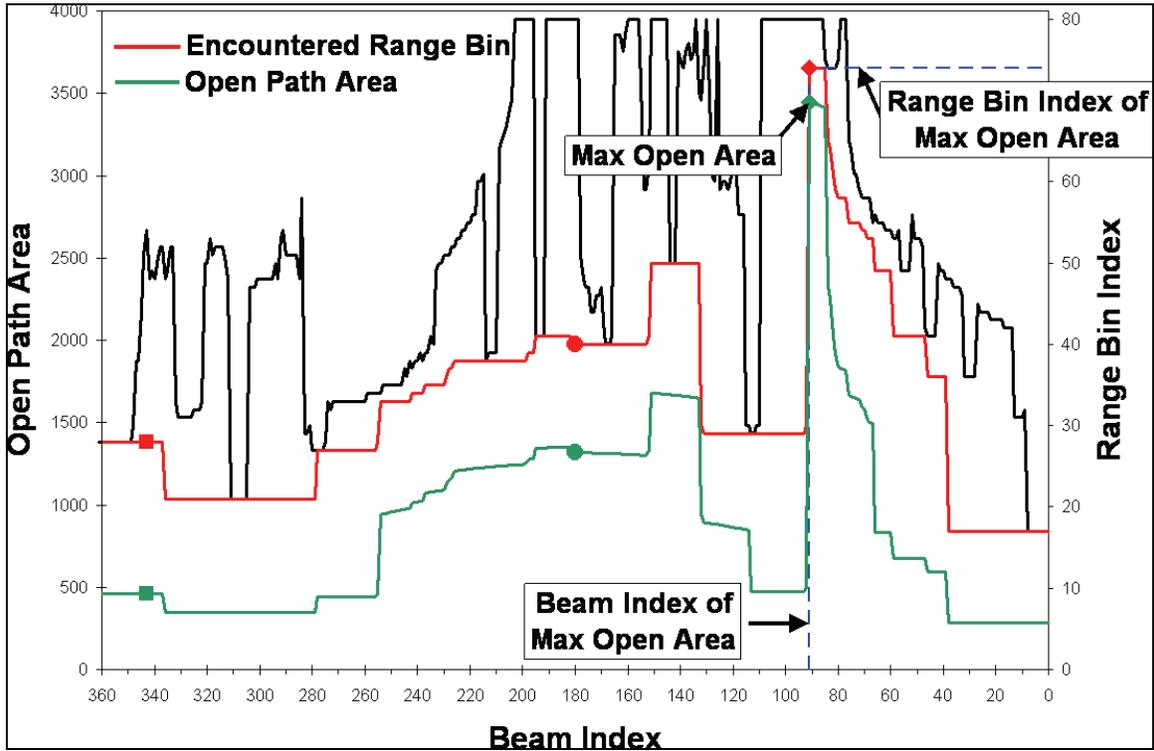


Figure 9. Encountered range bins and open path areas.

4. Results and Conclusions

Figure 10 shows the path taken by a virtual robot under the control of the algorithm. The robot responds to the virtual range data from the obstacles by turning in place towards, and then moving in the direction of, the most open path that will accommodate the width of the robot. Figure 11 is another example of paths found through a cluttered room. The robot starts at several arbitrary locations and orientations. The first fan of laser range data is shown in red. The paths eventually find the door, but the robot is not seeking nor is it attracted to the door. It has no knowledge of its location. The robot only responds to the door's presence when it is in the LIDAR's field of view. It moves toward it because it presents as a more open path.

The algorithm is not designed to seek out an exit. Rather, the robot simply wanders along the most open path. This does not guarantee that a doorway will be found, as shown in figure 12, where the robot starts in a large empty room with a small doorway just wide enough for the robot to go through. The path the robot takes approaches the door on several loops but does not pass

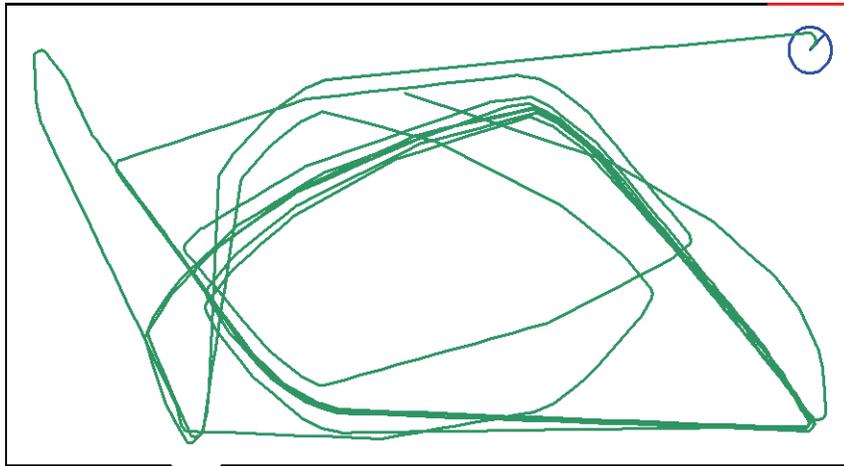


Figure 12. Path through a large empty room with a small door.

5. Conclusions

The algorithm developed proved to be a rather robust obstacle avoidance technique. The algorithm was implemented on a skid-steer Segway Robotic Mobility Platform (RMP), as shown in figure 13. The RMP seemed almost intuitively to search out a clear path. For example, it would weave its way between traffic cones placed in random order in front of it. Also, starting in a closed area surrounded by cones, one cone was arbitrarily removed to create an opening just wide enough for the RMP to pass through. The RMP would move around within the area until the opening came within view. Then it would line itself up to the opening and exit the area. It was found that the dynamic motion of the robot precluded an exact repeat of a change in direction. This proved to be an asset as it ensured a bit of randomness to the robot's path; the robot did not get locked into a repeating pattern and eventually "saw" the opening. The robot would also center itself while going down a hallway.

The Open-Path Obstacle Avoidance Algorithm described in this report results in a fluid robot motion that reacts to and naturally avoids obstacles in its path. The laser range data are quickly manipulated to identify the direction of the path that is least obstructed. The algorithm returns direction and range indices that are used in a lookup table containing the open area of the path. These areas need only be computed once and stored. The algorithm could be coupled to other algorithms that look for doorways or other features. A robot need not be directed to go in the direction of the most open area. The method shown to determine if a path is open enough for a robot to fit could also simply be used to check if goal points of a desired path are unobstructed.



Figure 13. Skid-steer Segway Robotic Mobilty Platform.

| NO OF. COPIES | ORGANIZATION | NO OF. COPIES | ORGANIZATION |
|------------------|--|------------------|---|
| 1 ELEC | ADMNSTR DEFNS TECHL INFO CTR ATTN DTIC OCP 8725 JOHN J KINGMAN RD STE 0944 FT BELVOIR VA 22060-6218 | 1 | US ARMY INFO SYS ENGRG CMND ATTN AMSEL IE TD F JENIA FT HUACHUCA AZ 85613-5300 |
| 1 | DARPA ATTN IXO S WELBY 3701 N FAIRFAX DR ARLINGTON VA 22203-1714 | 1 | COMMANDER US ARMY RDECOM ATTN AMSRD AMR W C MCCORKLE 5400 FOWLER RD REDSTONE ARSENAL AL 35898-5000 |
| 1 CD | OFC OF THE SECY OF DEFNS ATTN ODDRE (R&AT) THE PENTAGON WASHINGTON DC 20301-3080 | 10 | US ARMY RDECOM TARDEC ATTN MAJ N WIEDENMAN 6501 E ELEVEN MILE RD BLDG 200C MAILSTOP 263 WARREN MI 48092 |
| 2 | B/1-6 IN, TF 1-35 AR 1LT W BROWN CAMP STRYKER/COP CASHE SOUTH APO AE 09322 | 1 | NASA LANGLEY ATTN AMSRD ARL VT M NIXON BLDG 648 RM 252B HAMPTON VA 23681-0001 |
| 1 | US ARMY RSRCH DEV AND ENGRG CMND ARMAMENT RSRCH DEV AND ENGRG CTR ARMAMENT ENGRG AND TECHNLGY CTR ATTN AMSRD AAR AEF T J MATTS BLDG 305 ABERDEEN PROVING GROUND MD 21005-5001 | 1 | US GOVERNMENT PRINT OFF DEPOSITORY RECEIVING SECTION ATTN MAIL STOP IDAD J TATE 732 NORTH CAPITOL ST NW WASHINGTON DC 20402 |
| 1 | DEPARTMENT OF ELECTRICAL ENGINEERING & COMPUTER SCIENCES ATTN MAJ C KORPELA 646 SWIFT RD WEST POINT NY 10996 | 4 | US ARMY RSRCH LAB ATTN AMSRD ARL VT UV H L EDGE ATTN AMSRD ARL VT UV R VON WAHLDE (3 COPIES) ABERDEEN PROVING GROUND MD 21005 |
| 1 | DIRECTOR MATHEMATICAL SCIENCES CENTER OF EXCELLENCE 646 SWIFT RD WEST POINT NY 10996 | 1 | US ARMY RSRCH LAB ATTN AMSRD ARL VT UV S WILKERSON BLDG 390 ABERDEEN PROVING GROUND MD 21005 |
| 1 | PM TIMS, PROFILER (MMS-P) AN/TMQ-52 ATTN B GRIFFIES BUILDING 563 FT MONMOUTH NJ 07703 | 1 | US ARMY RSRCH LAB ATTN AMSRD ARL CI OK TP TECHL LIB T LANDFRIED BLDG 4600 ABERDEEN PROVING GROUND MD 21005-5066 |

| NO OF. COPIES | ORGANIZATION |
|------------------|--|
| 1 | DIRECTOR US ARMY RSRCH LAB ATTN AMSRD ARL RO EV W D BACH PO BOX 12211 RESEARCH TRIANGLE PARK NC 27709 |
| 1 | CADET CORPORAL C VIQUEIRA PO BOX 4461 USMA WEST POINT NJ 10997-4461 |
| 3 | ALBERT B BROWN JR 8912 TIMBER TRAIL COVE CORDOVA TN 38018-7404 |
| 3 | US ARMY RSRCH LAB ATTN AMSRD ARL CI OK PE TECHL PUB ATTN AMSRD ARL CI OK TL TECHL LIB ATTN IMNE ALC IMS MAIL & RECORDS MGMT ADELPHI MD 20783-1197 |

TOTAL: 37 (1 ELEC, 1 CD, 35 HCS)

INTENTIONALLY LEFT BLANK.