

# **Auditory Hazard Units as an Index of Risk from Intense Sounds**


G. Richard Price  
US Army Research Laboratory  
and  
AHAnalysis

Presented at the Third  
National Occupational Research Agenda  
(NORA) Hearing Loss Team Best Practice  
Workshop  
Cincinnati, Ohio  
May 8, 2003

# The Impulse Noise Problem

- A long history
- Baffling data with traditional measures, e.g.
  - If A-weighted energy is used:
    - 2000 - 3000 J/M<sup>2</sup> measured under a muff found acceptable for cannon impulses.
    - Implies that 2000+ rounds unprotected exposure from a rifle would be safe
    - In fact, fewer than 10 rounds are hazardous

# Consider Peak Pressure and Duration

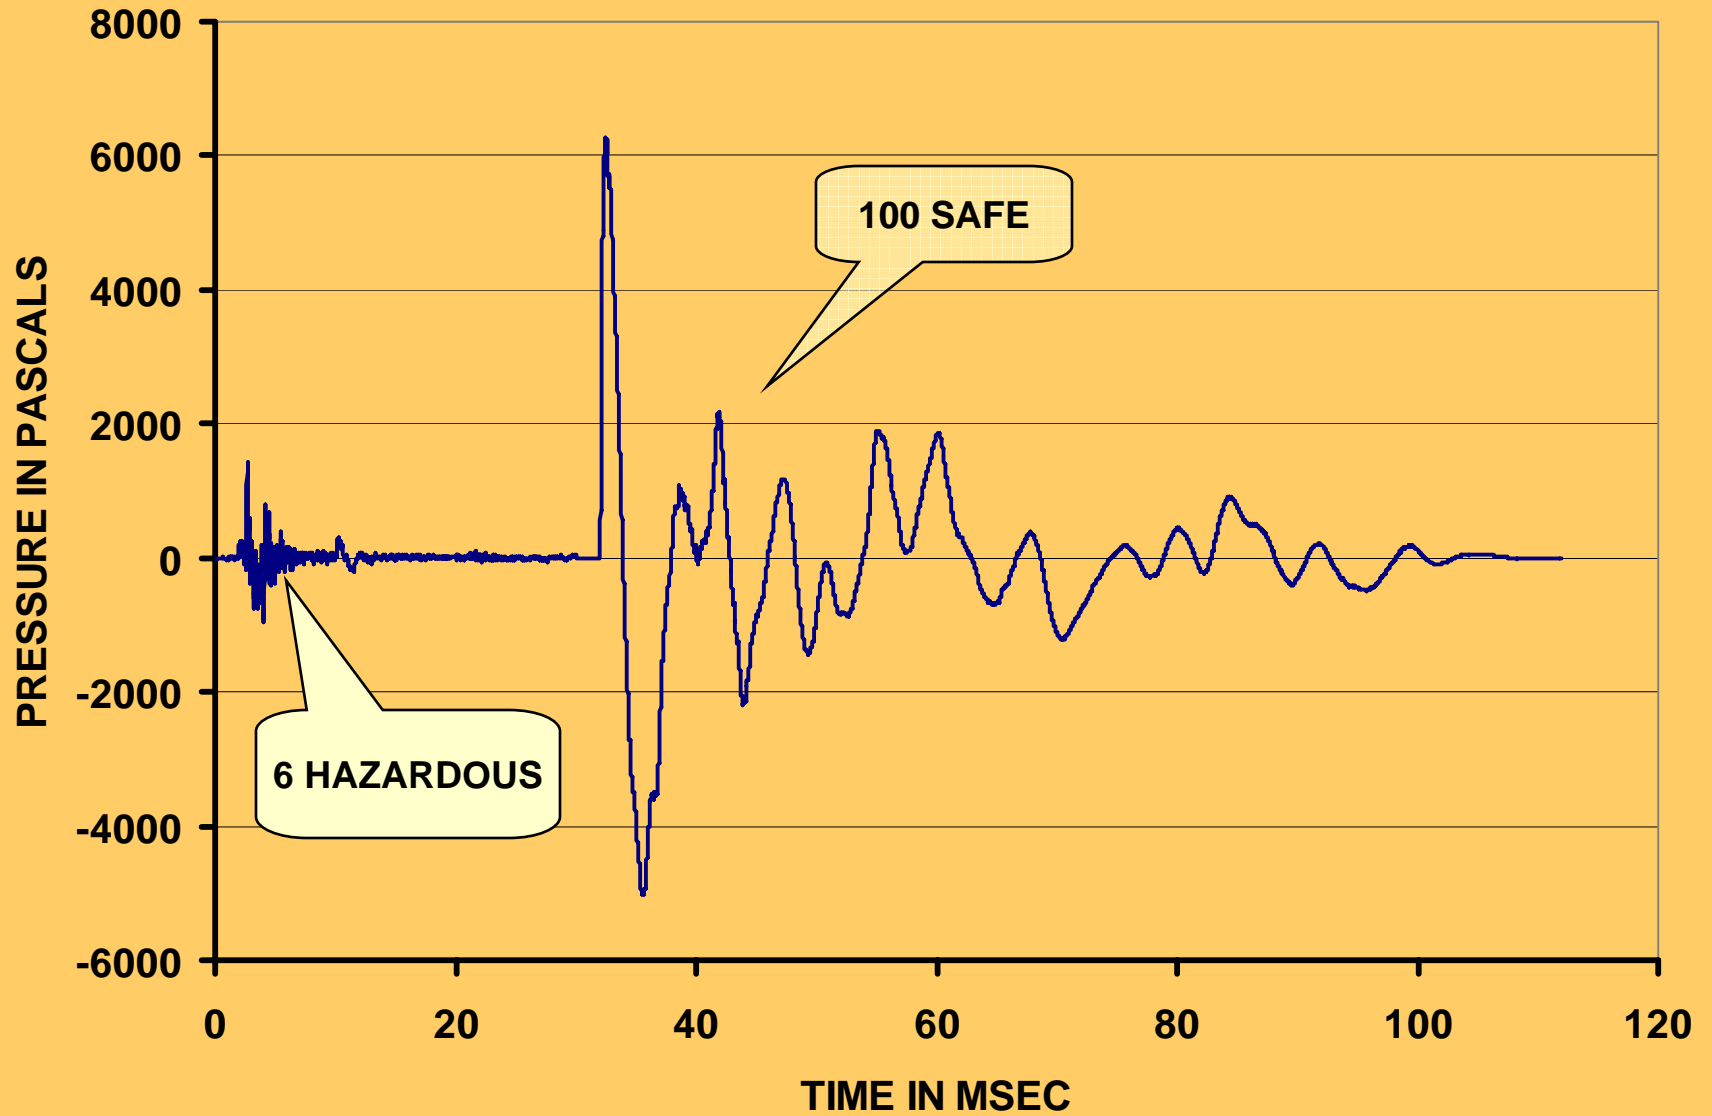

# Our approach to the problem

- Try to understand the ear's behavior at high level's of simulation,
- Then devise a measure that was critically related.
- The ear's response is complex
  - Several non-linearities
  - Simple graphic approach won't work.
- A mathematical model of the ear created to deal with the complexity – the Auditory Hazard Assessment Algorithm for Human (AHAAH)
- A new unit of hazard produced:

# The Auditory Hazard Unit (AHU)

- Defined within cochlea (site of damage) as:
  - Peak upward deflection of the basilar membrane
  - In microns
  - Squared
  - Summed at a location

$$\text{AHU} = \text{Sum (of peaks in microns}^2\text{)}$$

- Is an output of AHAAH



# Insights Embodied in AHAAH

- Primary site of damage is the organ of Corti.
- Loss mechanism is mechanical at high SPLs and becomes linear in time.
- External and middle ears shape the flow of energy:
  - A band-pass filter.
  - Middle ear muscles, when contracting, attenuate by stiffening the middle ear.

# Basic Research Insights Embodied in AHAAH (continued)

- Annular ligament limits middle ear displacements - strongly peak clips at very high pressures.
- Mammalian ears are similar; hence fundamental loss processes will be as well.
- Accurate prediction is the goal:
  - Under-prediction results in hearing loss
  - Over-prediction results in unnecessary restrictions and ineffective systems

# AHAA Developed

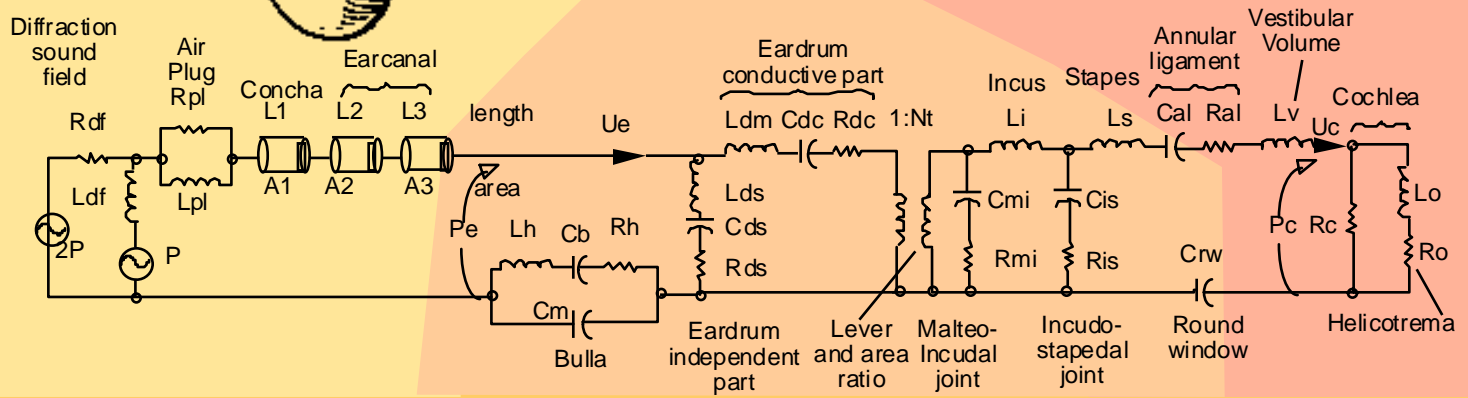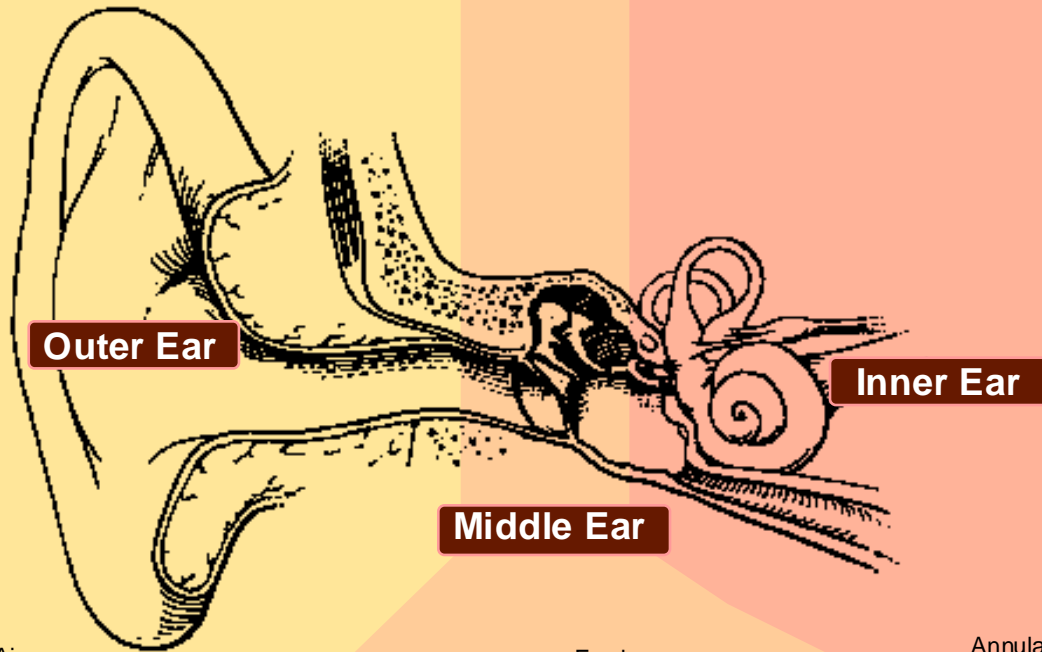




# Creation of AHAA


- Created first for the cat ear – allowed real ears to be tested with damaging stimulation
- Electrophysiological measures of hearing used
- Wide range of conditions tested
  - Primer impulses
  - M-16 rifle impulses
  - Airbags
  - SPLs from 135 to 172 dB peak
  - 1 to 50 impulses
- Predictions of AHAA compared with effects

# Prediction of Threshold Shift


VALIDATION OF CAT EAR MODEL

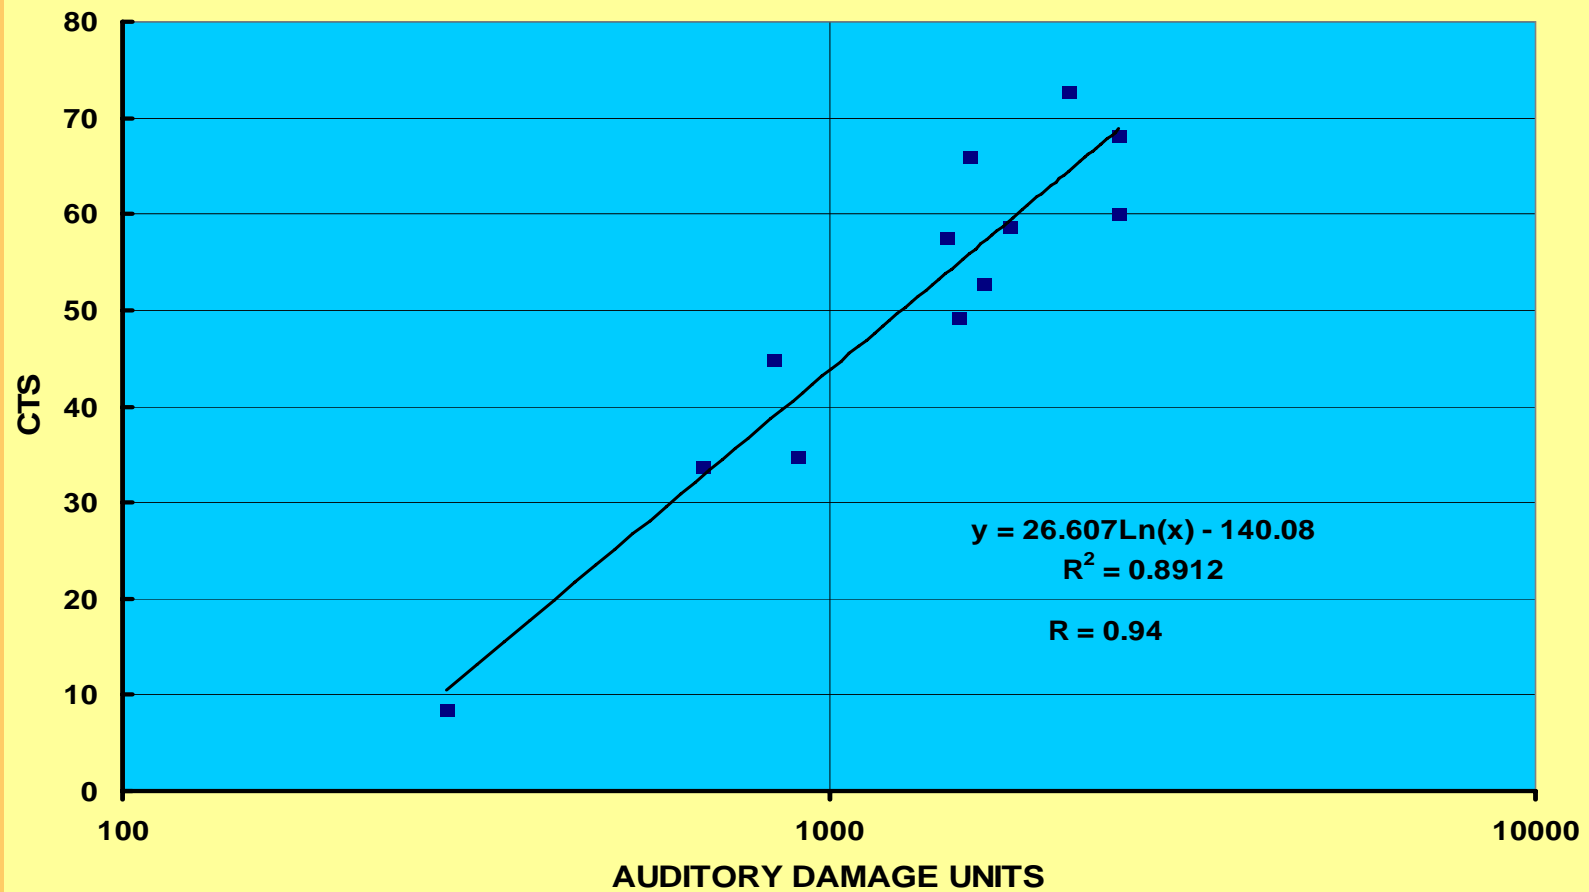

# Correlation with hair cell loss

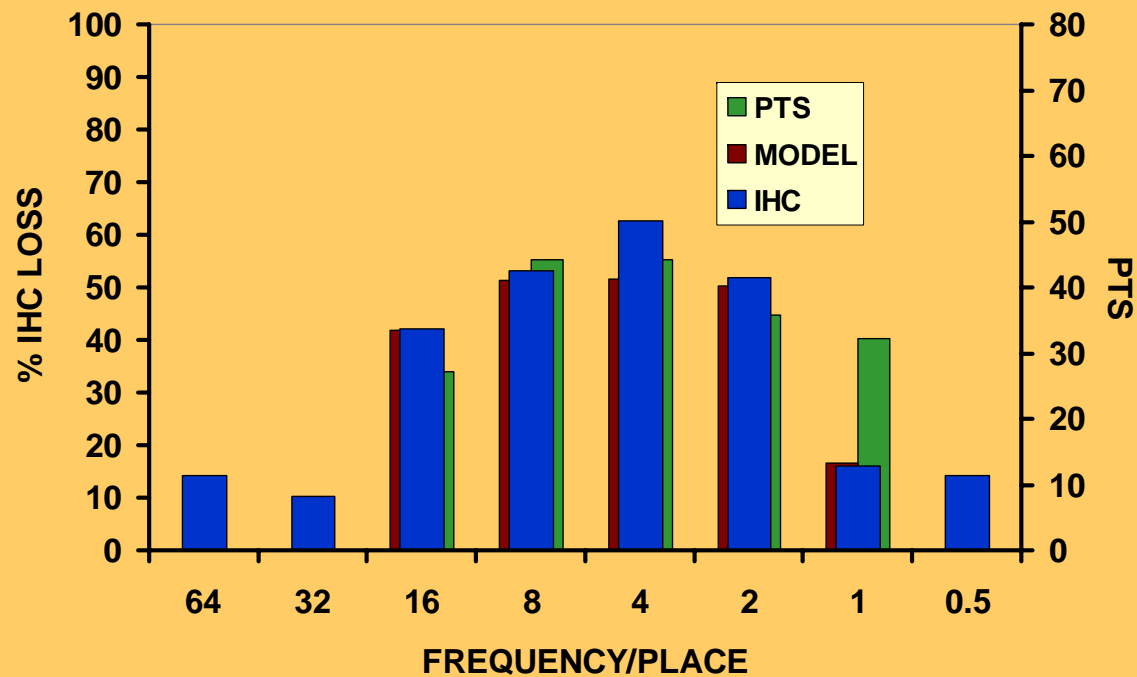

# CTS-PTS Relationship

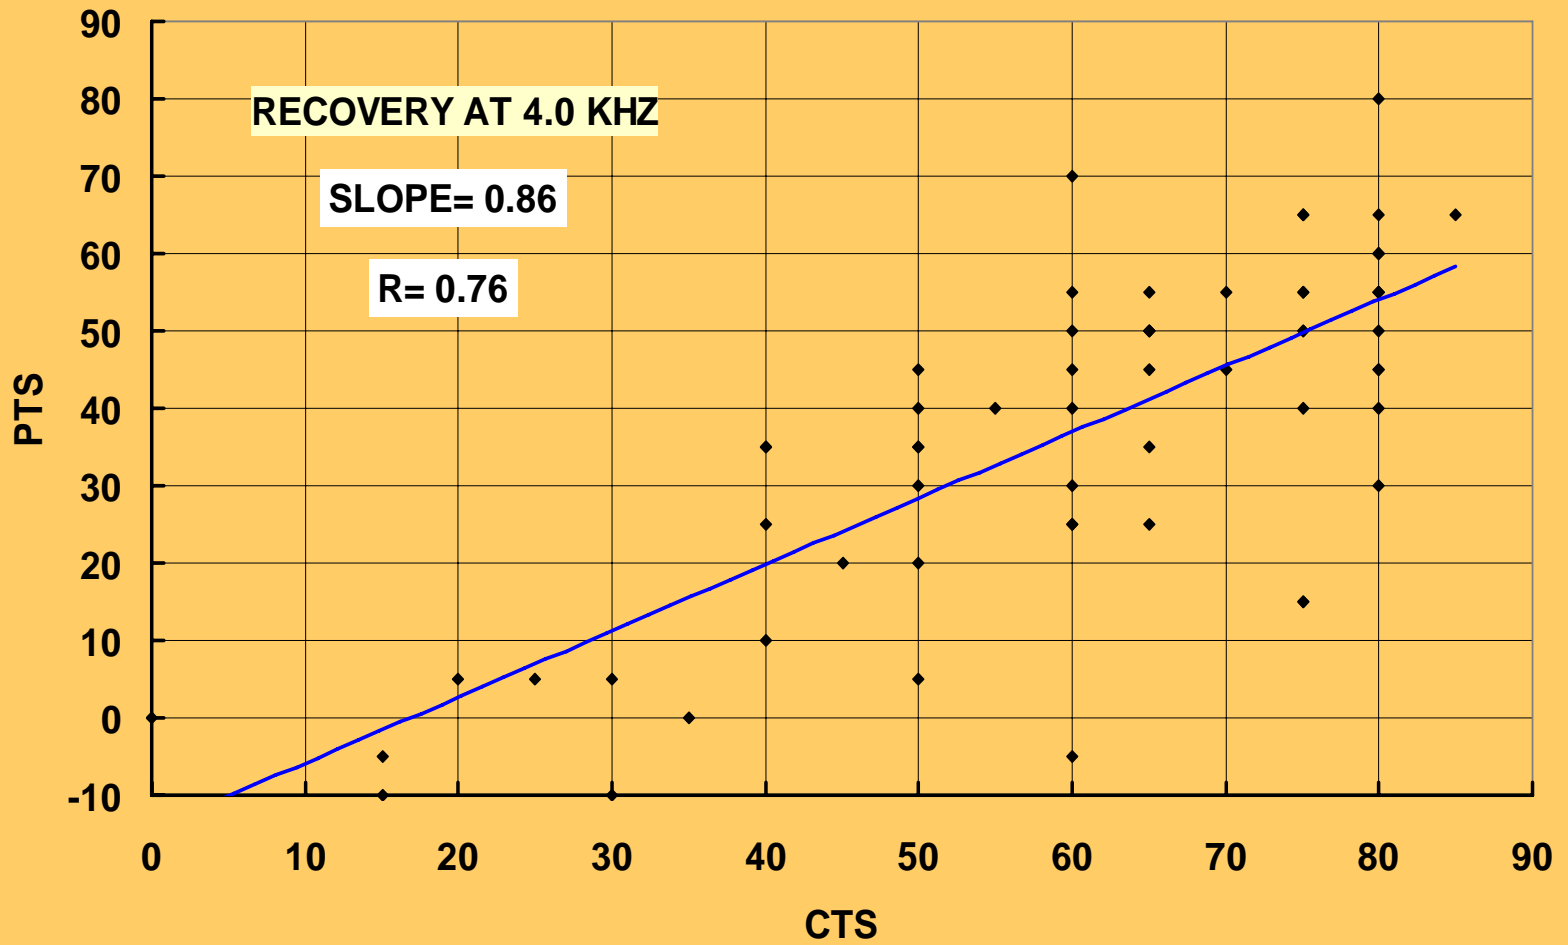


## For Cat Model:

- Predicts:
  - CTS
  - PTS
  - Hair cell loss
- For wide range of stimuli
- Model ready for transformation into human form


# Creation of the Human Version

- Variables changed to human values
- Adjusted to get conductive path correct
- Stapes to basilar membrane transfer set to be similar to cat in mid-range of sensitivity
- Note: no hearing loss data used at this point (1997)
- Expectation:
  - Try to predict hearing loss data
  - Adjust as necessary
- In fact, no adjustment has been necessary

# Transfer function – FF to Ear Drum

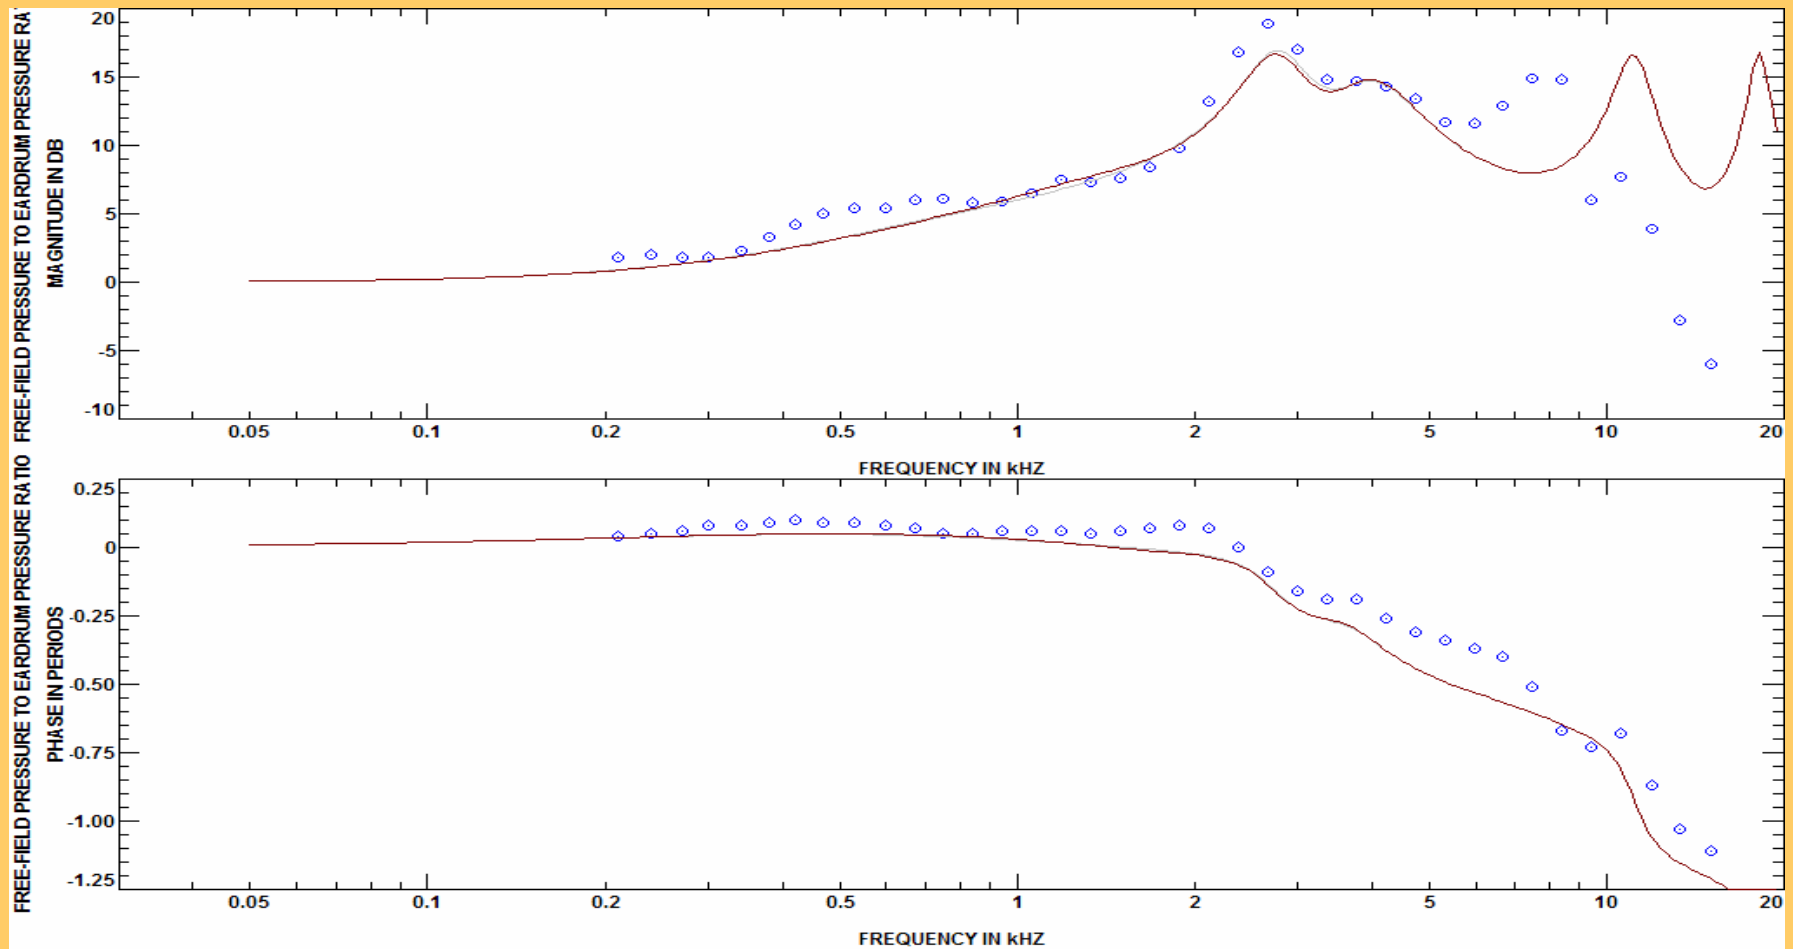


# Transfer function: ED to Stapes

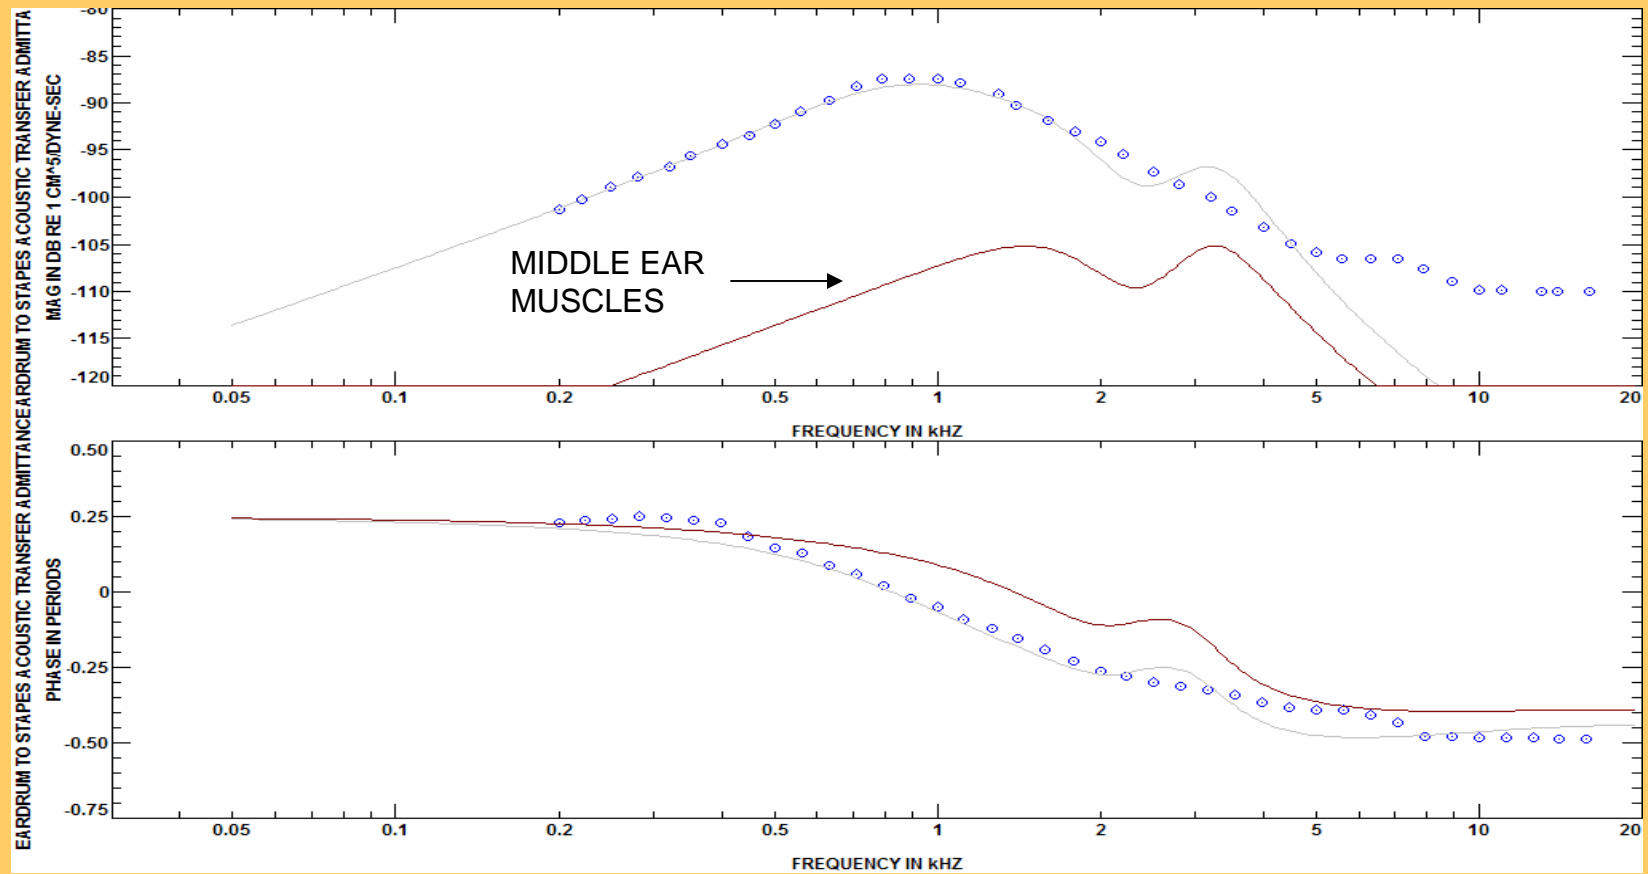



# FF to Stapes, A-Weighting

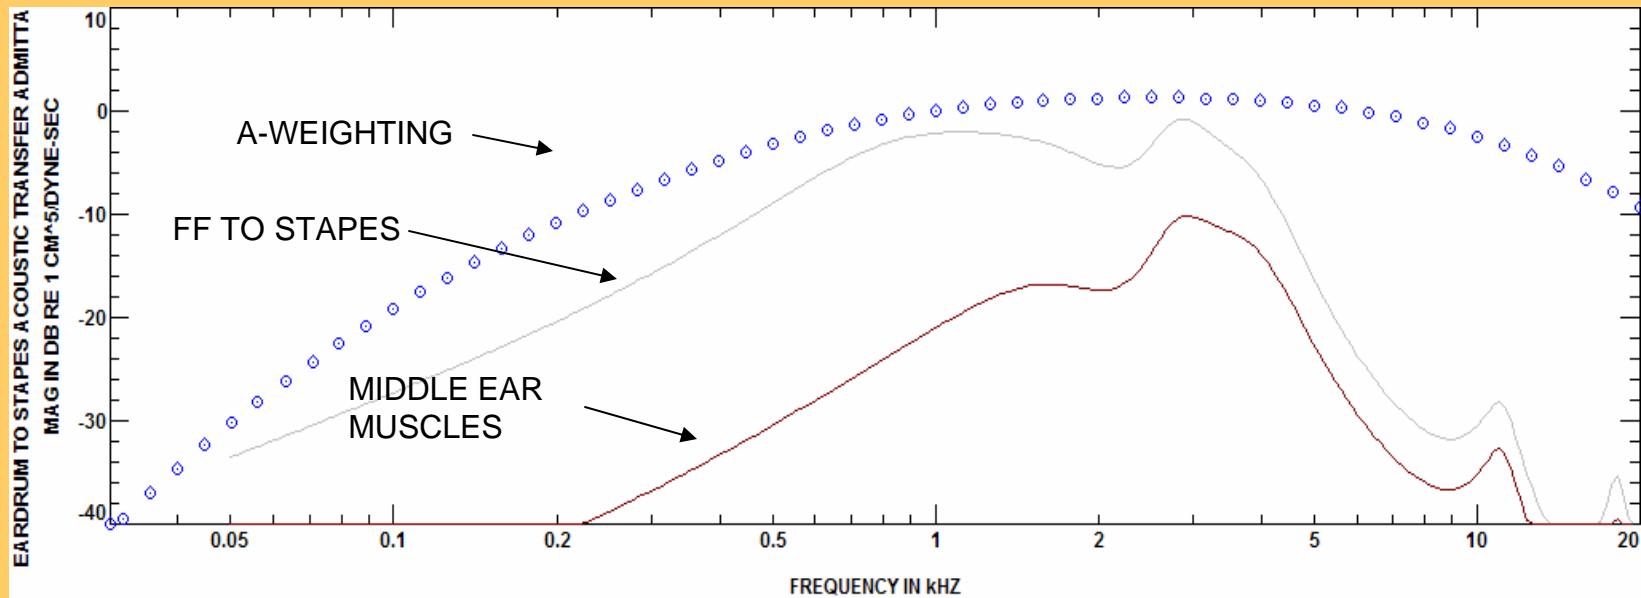

## But does AHAAH predict hazard?

- Compare AHUs from waveforms from human exposures with resulting changes in hearing
- Data sets available:
  - Albuquerque data
  - Small arms studies
  - Spark gap discharges
  - 120 mm mortar
  - Some clinical data

# The Albuquerque Data

- Large caliber fire simulated with explosive charges
- 3 types of free field impulse
  - At 7 levels (3 dB steps)
  - For 6, 12, 25, 50 or 100 impulses
  - 178 dB to 194dB peak
- A reverberant impulse (at 7 levels, 1, 2, 3 rds)
- 2 HPDs
- In all, 53 conditions with 60 Ss per condition

## Hazard is predicted when:

- For AHAAH: >500 AHUs (sum during exposure)
- For A-weighted energy: >8.7 J/m<sup>2</sup> (total during exposure)
- For MIL-STD 1474: Peak pressure/duration exceeds limits on chart

# How do we define “success” in a prediction ?

- Hazard for an ear =  $>25\text{dB TS}$  at any frequency
- To be 95% sure that 95%ile case has been reached, for  $n=60$ , must have 6 or more “failures”, i.e.  $>5$  failures = hazardous condition
- Or, if failure is predicted, can't say it was not hazardous if a least one failure occurs.
- For 2 to 5 cases, just can't be 95% certain.
- Rule(s) applied to predictions by MIL-Std 1474, A-weighted energy and AHAAH.

# Evaluation Diagram

		OUTCOME	
		SAFE	HAZARDOUS
PREDICTION	SAFE	CORRECT RATING	UNDER-ESTIMATE AUDITORY CASUALTIES POORER COMMO MISSION ENDANGERED
	HAZARDOUS	OVER-ESTIMATE LESS EFFECTIVE WEAPONS MISSION ENDANGERED EXCESS CASUALTIES	CORRECT RATING

EVALUATION BY MIL STD-1474

OUTCOME

SAFE

HAZARDOUS

PREDICTION  
SAFE  
HAZARDOUS

01	T1	T2							
F1	F2	F3							
G1	G2	G3							
R1	R2								
O2	O3	O4	O5	O5	O7	O8	O9	OF	OH
T3	T4	T5	T6	T7	T8		T9	TF	TH
F4	F5	F6	F7	F8	F9		FF	FH	
G4	G5	G6	G7	G8	G9	GF	R9		
GH	R3	R4	R5	R6	R7	R8			

		EVALUATION BASED ON A-WEIGHTED ENERGY																																																
		OUTCOME																																																
		SAFE						HAZARDOUS																																										
PREDICTION	SAFE	G1	G2	G3																																														
	HAZARDOUS	O1	O2	O3	O4	O5	O6	O7	O8	O9	OF	OF	T1	T2	T3	T4	T5	T6	T7	T8	T9	TF	TH	F1	F2	F3	F4	F5	F6	F7	F8	FF	FH	F9	R1	R2	R3	R4	R5	R6	R7	R8	R9	G4	G5	G6	G7	G8	G9	GF

ERRORS OFTEN > 20 DB





EVALUATION BY AHAH

OUTCOME

SAFE

HAZARDOUS

PREDICTION  
SAFE  
HAZARDOUS

O1	O2	O3	O4	O5	O6	O7	O8
T1	T2	T3	T4	T5	T6	T7	T8
F1	F2	F3	F4	F5	F6	F7	F8
G1	G2	G3	G4	G5	G6	G7	G8
G9							
R1	R2	R3	R4	R5	R6	R7	R8

GF	GH	R9
----	----	----

--	--	--	--	--	--	--	--

O9	OF	OH
T9	TF	TH
F9	FF	FH

# Exposure to other impulses

- Need good waveform for AHAAH analysis or A-weighted energy measure
- Data reported vary with study – AHAAH can calculate equivalent data for comparison
- Keep criterion of 25 dB threshold shift at any frequency as hazardous.

# Summary of AHAAH Predictions

- 7.62mm, 50rds at 155dB - correct
- 7.62mm, 25rds at 155dB - correct
- 7.62mm, 25rds at 158dB - correct
- FNC 6 rounds at 156dB - correct
- FNC 5 rounds at 156dB - correct
- G3 5 rounds at 159dB- correct
- LAW 1 round - correct on 5 different exposures
- Spark Gap impulses - correct on 4 predictions
- AT4, 1 round, correct
- 120 mm Mortar, 7 rounds, protected ears, correct

## In summary

- AHAAH: 95% accuracy over all
- MIL STD 1474: 38% accuracy (protected ears)
- A-weighted energy: 30% accuracy over all
- AHAAH model works well
  - All types of impulses
  - Protected ears
  - Unprotected ears

# Why does AHAAH work so well in comparison to other methods?

- At lower pressures, the normal transmission path dominates and the model reproduces it. (Similar to A-weighting).
- It accounts for middle ear muscle attenuation
- **Most important:** at higher pressures, non-linear middle ear correctly limits energy entering cochlea.
- Given a non-linear middle ear, linear systems, if correct at one pressure/frequency regime, must be wrong elsewhere.

# Functional issues: Accounting for hearing protection

- Pressure waveforms measured under protector on a manikin at ear drum position or ear canal entrance can enter AHAAH at the right “place” and are properly evaluated.
- If a manikin is used, angular dependence of hazard is also correctly determined.
- Or effect of HPD can be calculated with digital filter or model – allows ‘de-rating’ to account for fit.

# Operational issues – How it works

- Runs on a PC – short analysis time.
- Uses WINDOWS conventions
- Program includes tools for importing, editing, analyzing and printing waveforms.
- Operates on a digitized waveform.
- Outputs hazard in AHUs and
- Makes a movie of the action within the cochlea (allows engineering insight)

# **“Official” Status of Model**

- Peer reviewed at request of U.S. Army Medical Research and Development Command by the American Institute of Biological Sciences



## **AIBS Peer Review Affirmed:**

“ The Panel recommends that free-field pressure traces should be input to the model ----- and that personnel be allowed to be exposed to combinations of noise that does not result in more than 500 ADUs per day. The Panel feels that it was satisfactorily demonstrated that this limitation would produce 95/95 protection – that is, there is 95% confidence that 95% of the population will experience temporary threshold shift (TTS) that is less than 25 dB. The Panel feels that the process can be applied to all impulse noise conditions, including those whose pressure-time histories appear to be quite different from the ones collected in the Albuquerque study, and still provide the same protection. Finally, the Panel feels that this criterion will provide adequate protection against unacceptable auditory damage over the soldier’s occupational lifetime, as long as the devices are worn and properly fit.”

## **“Official” status of model**

- Successfully peer reviewed by AIBS
- Used internationally by SAE as basis for evaluation of noise of airbag deployment
- Being proposed to Army’s Surgeon General by USACHPPM as basis for impulse noise hazard rating (first ever!).
- In draft ANSI standard – (legacy of Dan Johnson)
- Used by NOISH, SAIC, DEBAKOM
- Will be available, with documentation, on ARL website

**Thank you for your attention!**

**Any questions?**